

SPECIFICATION

TRACCESS 135 and 135/1

TECHNICAL DATA

- Articulated boom (one element) + telescopic boom (main boom + extension) + jib
- 320° turret rotation on bearing turntable
- Individual hydraulic controls in basket
- Engine start and stop controls from basket
- Basket base in composite material with aluminium guardrails
- Automatic hydraulically actioned basket levelling
- Basket load sensing device
- N° 4 hydraulic outriggers with ground pressure sensors
- 230 V AC EC electrical socket in the basket
- Gradeability approximately 31%
- Drive speed max 1,5 Km /h
- Single cylinder 13 HP petrol engine (Traccess 135/1)
Single cylinder 15 HP petrol engine (Traccess 135)
- Electro-hydraulic steering from the ground with an umbilical remote control system
- 230 V 1,5 Kw auxiliary engine
- Hour meter
- Standard boom colours blue (RAL 5017) or white (RAL 9003)
- CE certified
- Remote spiral cable for traverse from ground


PERFORMANCE TRACCESS	135/1	135
Working height	13,3 m	13 m
Platform height	11,3 cm	11 m
Working outreach	7 m	6,5 m
Capacity	120 kg	200 kg
Basket dim.	700x780x1100xmm	1300x780x1100 mm
Closed dimensions (transit)	3760x780x2000 mm	3760x780x2000 mm
Unit weight	1450 kg	1600 kg




TECHNICAL DETAILS

- 2 x Safety Harness hooking locations on the platform
- Emergency push button
- Emergency manual pump
- Outriggers/boom interlocking facility
- Manual emergency lowering valves
- Cylinders with safety non-return valves
- Intermittent buzzer for traverse and turnable rotation
- Instructions & Maintenance Manual



TRACCESS 135 E

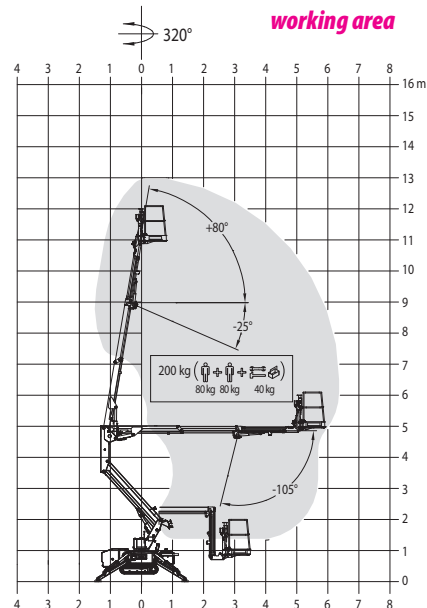



platform dimensions

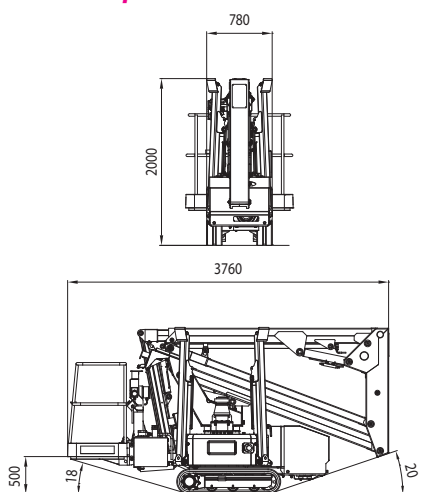

stabilization

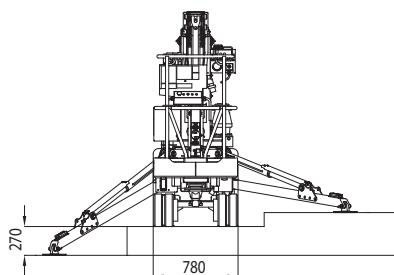

TRACCESS 135/1

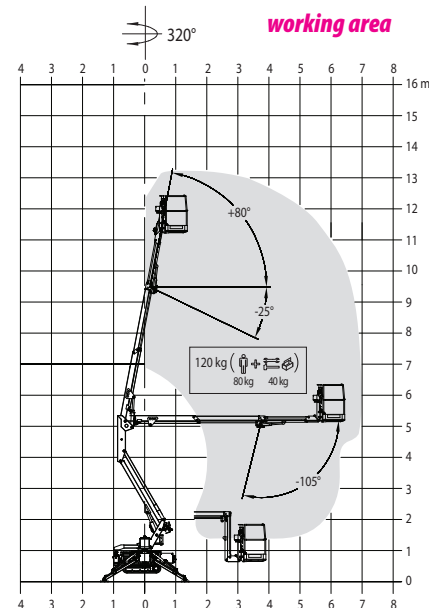

KEY POINTS

Compact closed dimensions: 78 cm (width) x 200 cm (height)

Basket load sensing device

Clean top boom, internal mounted services

230 V 1,5 Kw auxiliary engine

Individual hydraulic controls from basket

Single cylinder 13 HP petrol engine (Traccess 135/1)
Single cylinder 15 HP petrol engine (Traccess 135)

200 kg basket capacity throughout entire working area (135)
120 kg basket capacity throughout entire working area (135/1)

CTE S.p.A.

Headquarter and Factory - Rovereto (Tn): via Caproni, 7
Factory - Rivoli V.se (Vr): loc. Terramatta, 5

ph. +39 0464.48.50.50 - fax +39 0464.48.50.99
e-mail: info@ctelift.com

CTE UK Ltd - Enderby Leicestershire - UK
CTE FRANCE Sas - Achères - France

CTE
WORK BECOMES EASY

TRACCESS

www.ctelift.com