

SPECIFICATION

TRACCESS 230 winch version

TECHNICAL DATA

- Articulated boom (two elements) telescopic boom (main boom + 2 extension) + jib
- Sigma boom movement enabled by connecting rods
- 360° non continuous turret rotation on bearing turntable
- Proportional electro-hydraulic controls with radio remote control
- Engine start and stop controls from radio remote control
- Lifting Winch (250kg capacity)
- Basket load sensing device
- Radio remote control
- Dual drive speed
- Narrow jacking facility
- Extending width tracks
- 230V 2.2 kW electric auxiliary motor
- 15 HP HONDA petrol engine
- Automatic hydraulically actioned support winch levelling
- N° 4 hydraulic outriggers with ground pressure sensors
- Hour meter
- 230 V AC EC electrical socket
- Standard boom colours blue (RAL 5017) or white (RAL 9003)
- CE certified
- Gradeability approximately 31%
- Electro-hydraulic steering from the ground with radio control
- Drive speed max 2 km/h
- 4 stabilization areas with hydraulic placement

PERFORMANCE


Working height	20,5 m
Working outreach	10 m
Capacity	250 kg
Unit weight	2900 kg




TECHNICAL DETAILS

• Emergency push button • Emergency manual pump • Outriggers/boom interlocking facility • Cylinders with safety non-return valves • Intermittent buzzer for traverse and turnable rotation • Active track braking system automatically applied in stationary mode • Instructions & Maintenance Manual


PLATFORM DIMENSIONS

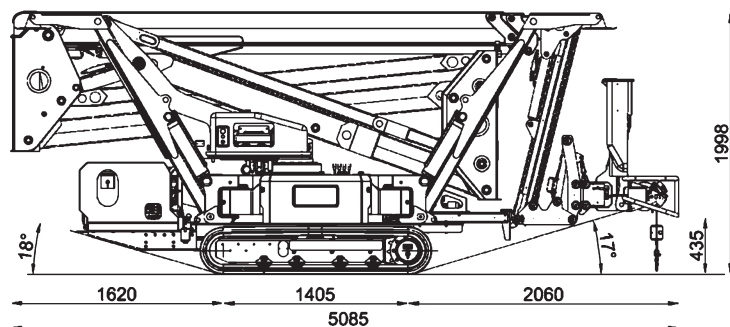


WORKING AREA

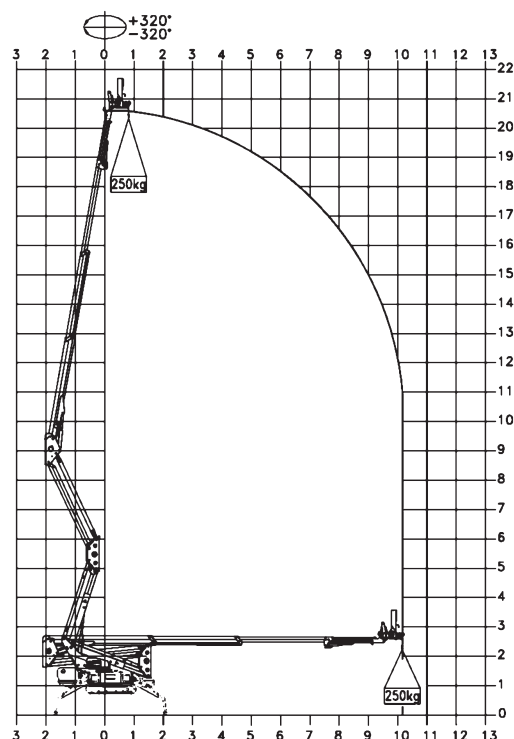

STABILIZATION

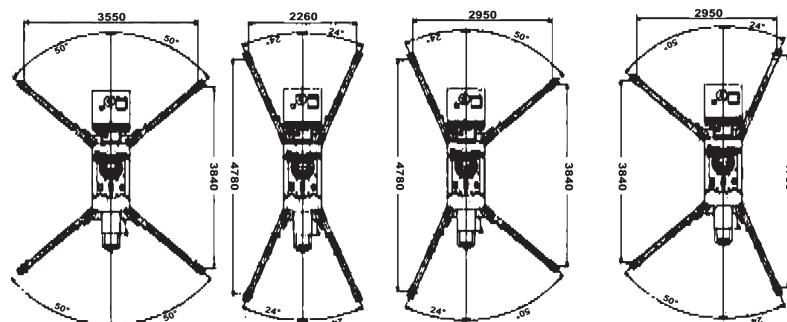

KEY POINTS

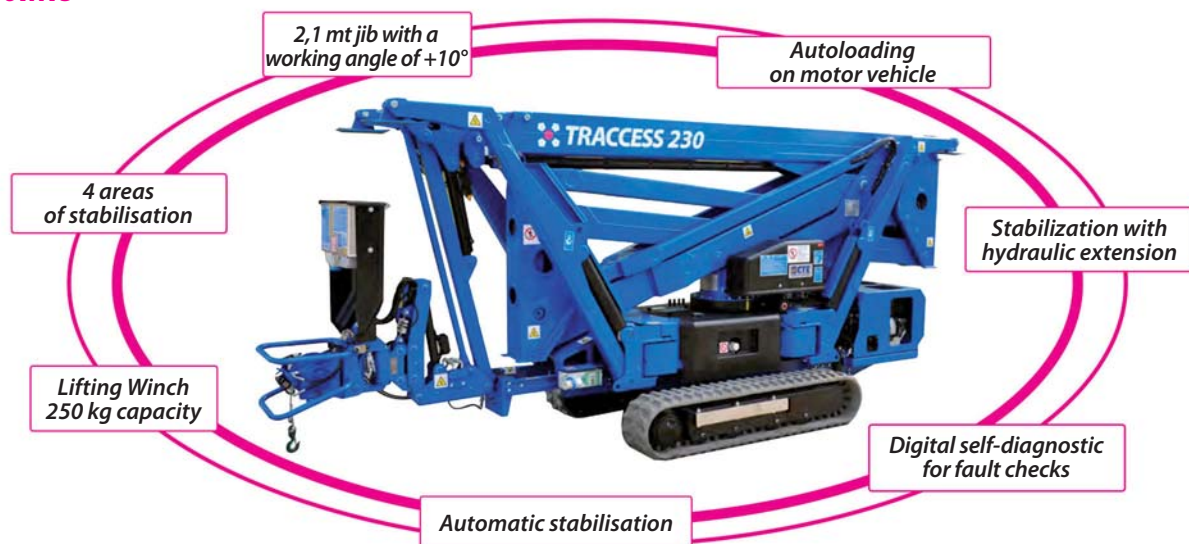

CTE S.p.A.

Headquarter and Factory - Rovereto (Tn): via Caproni, 7
Factory - Rivoli V.se (Vr): loc. Terramatta, 5

ph. +39 0464.48.50.50 - fax +39 0464.48.50.99
e-mail: info@ctelift.com

CTE UK Ltd - Enderby Leicestershire - UK
CTE FRANCE Sas - Achères - France

CTE
WORK BECOMES EASY

TRACCESS

www.ctelift.com

