


SPECIFICATION

CTEZED 25 HV

TECHNICAL DATA

- Double pantograph + telescopic boom with 2 extensions
- Sigma boom movement enabled by connecting rods
- Proportional, simultaneous electrohydraulic controls in basket and ground
- Engine start and stop controls from basket and ground
- Anti-slip aluminium deck
- Aluminum basket 1400x700x1100 mm
- 65° + 65° hydraulic basket rotation
- Automatic hydraulically actioned basket levelling
- 4 stabilisers with ground pressure sensors: front variable jacking outriggers and rear straight down stabilizers
- Variable stabilisation with **S³ Smart Stability System**
- **CAN BUS** electronic management system
- Grounded control station with wired console
- Load cell
- Diagnostic display on board
- Hydraulic system operated by vehicle's PTO
- Buzzer indicating PTO engaged
- Hour meter
- 230 V AC in the basket
- EN 280:2015 CE certified
- Standard boom colours
blue (RAL 5017) and white (RAL 9003)

DIMENSIONS

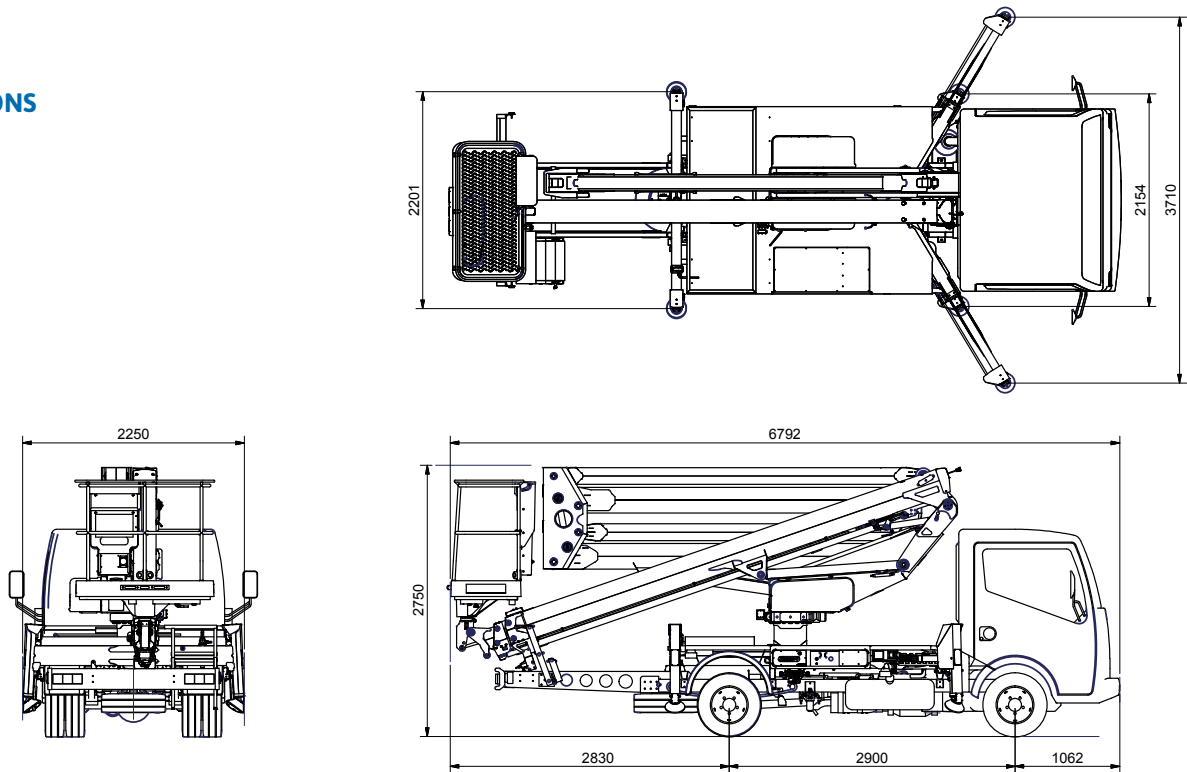

SPECIFICATION

CTEZED 25 HV



24,6 m*



12 m*



250 kg



22,6 m




1400x700x1100 mm


GVW min

3,5 t

OUTRIGGER FOOTPRINT

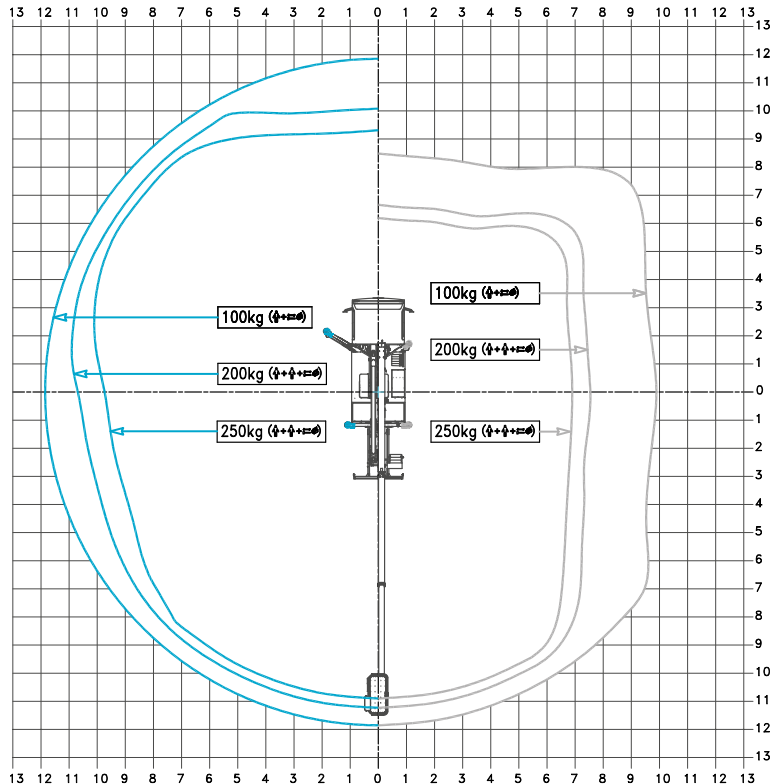

WORKING ENVELOPE

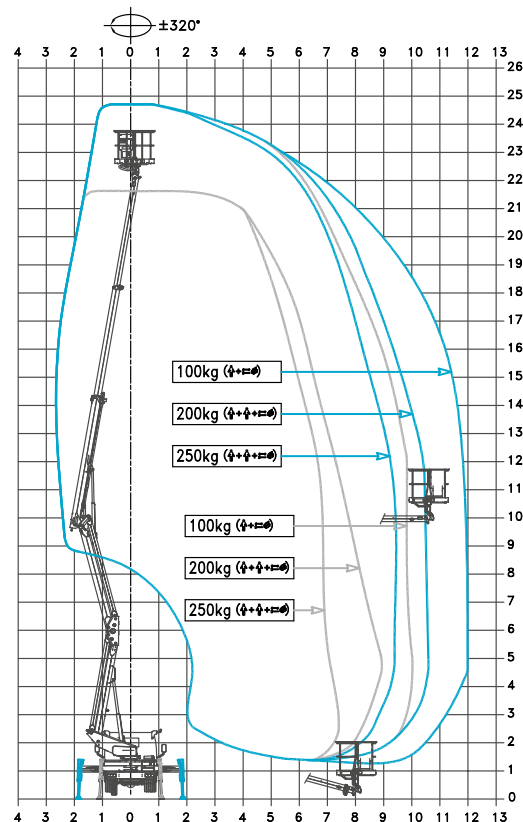

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only. _ZED 25 HV - ed. 05/18



CTE S.p.A.

Headquarter 7 Via Caproni - Rovereto (TN) IT, 38068

Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99

info@ctelift.com - www.ctelift.com

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

Warehouse 2 Via E. Fermi - Affi (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

