

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION

CTEZED 14.2 BR


TECHNICAL DATA

- Main boom articulated + one (01) arm
- 360° continuous turret rotation on bearing turntable
- Proportional controls from the ground and in the basket; both full hydraulic
- Engine start/stop controls from the basket and from the turret
- Basket dimensions: 1400x700x1100mm
- Basket rotation +/- 65°
- Basket base in composite material with aluminium guard-rail
- Nr. 4 (four) hydraulic outriggers
HS + HS/narrow straight down type
- Automatic hydraulically actioned levelling basket
- Electric system: 12V or 24V
- Emergency manual pump
- 230V AC EC electrical socket in the basket
- Standard boom colours:
blue (RAL 5017) or white (RAL 9010)

AVAILABLE OPTIONS

- 12 or 24V working light
- Hour meter
- Load cell in the basket
- VTR fiberglass basket


DIMENSIONS

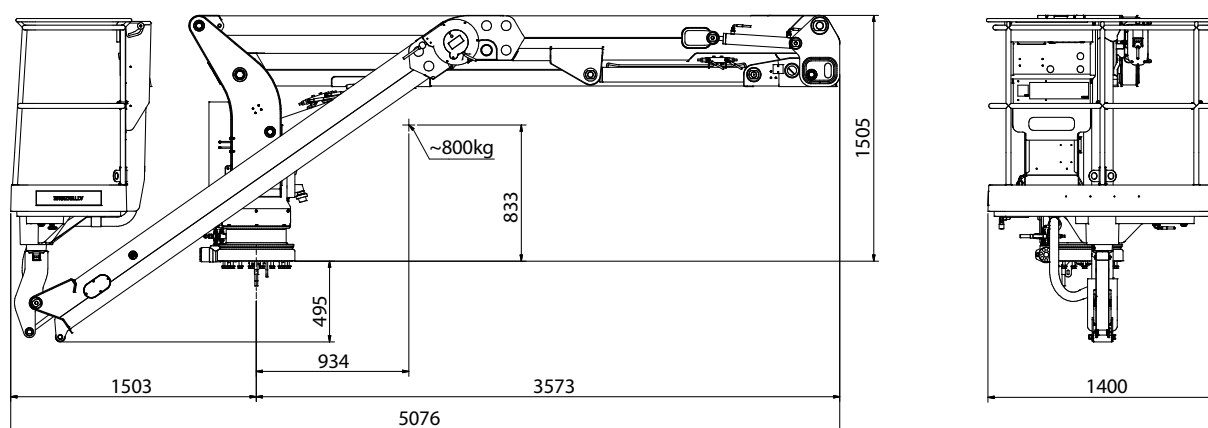

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION


CTEZED 14.2 BR

PERFORMANCE

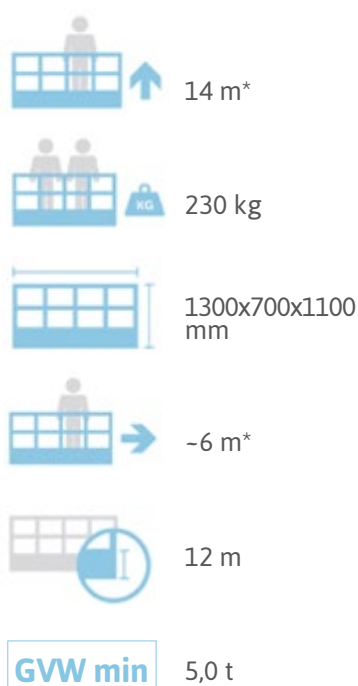

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

WORKING ENVELOPE

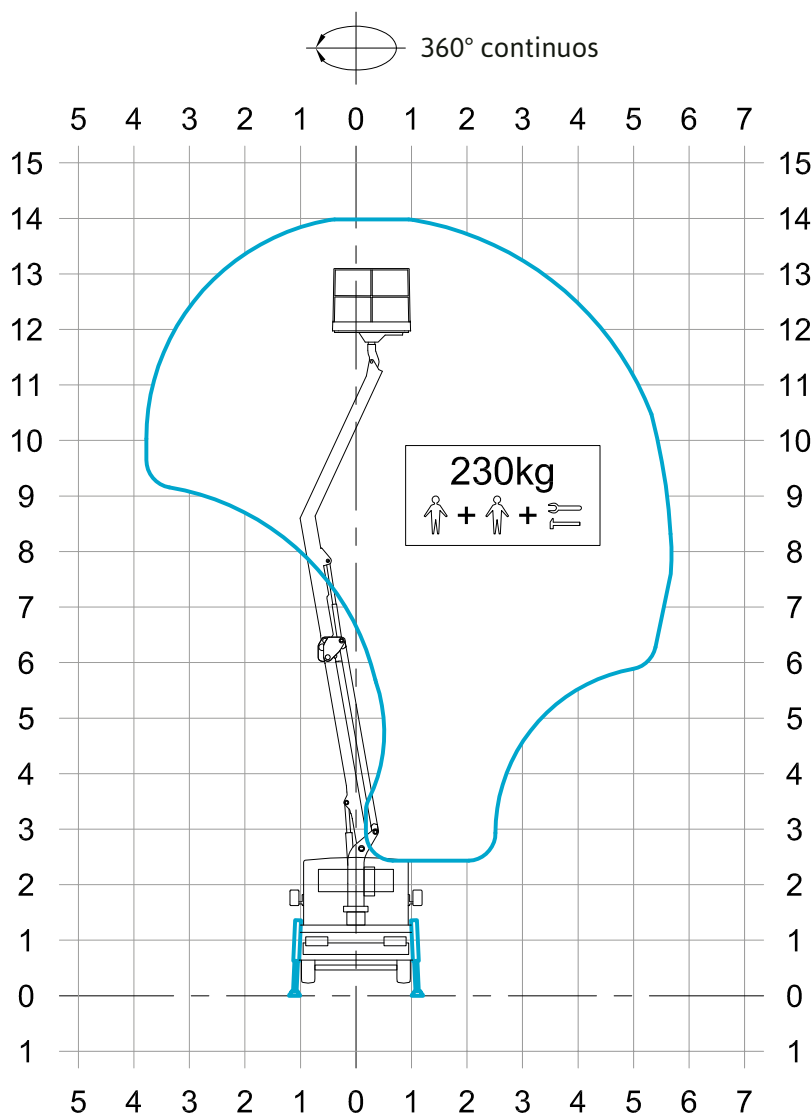

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only. _ZED 14.2 BR - ed. 02/20



CTE S.p.A.
Headquarter
 7 Via Caproni - Rovereto (TN) IT, 38068
 Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99
 info@ctelift.com - www.ctelift.com
Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010
CTE UK Ltd Enderby Leicestershire - UK