


SPECIFICATION

B-LIFT 150 PRO

WORKING ENVELOPE

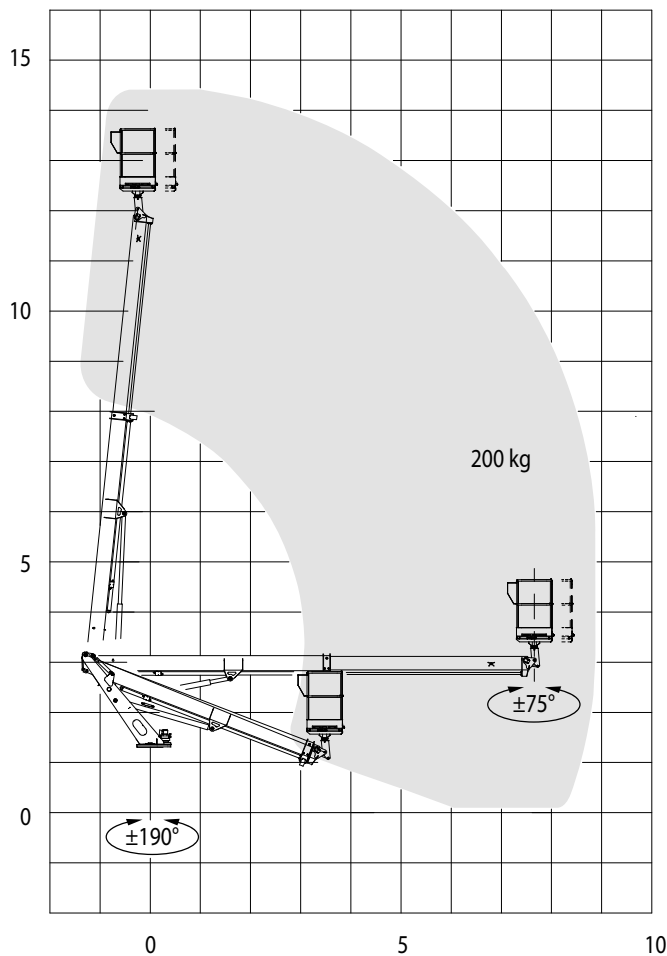

14,6 m*



8,9 m*



200 kg




12,6 m




1400x700x1100 mm

GVW min 3,5 t

DIMENSIONS

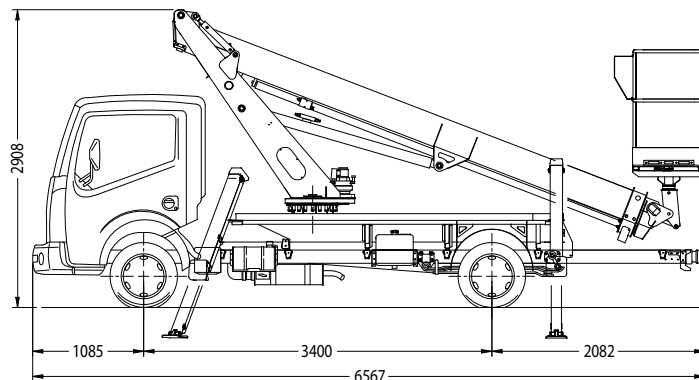

OUTRIGGER FOOTPRINT

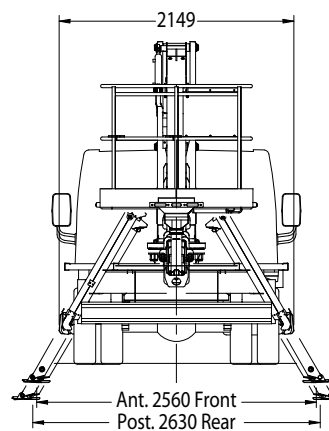

It's available version with 250 kg basket capacity.

The EASY KIT version is available for assembly on trucks with a g.v.w. of more than 3,5 ton, outside the CE countries.

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only. _B-LIFT 150 PRO - ed. 04/16



CTE S.p.A.
Headquarter
 7 Via Caproni - Rovereto (TN) IT, 38068
 Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99
 info@ctelift.com - www.ctelift.com
Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010
CTE UK Ltd Enderby Leicestershire - UK

