

TELESCOPIC TRUCK MOUNTED PLATFORM SPECIFICATION

CTEB-LIFT 150 HY


TECHNICAL DATA

- Telescopic boom
(2 elements: main boom + 1 telescopic extension)
- 380° non continuous turret rotation on bearing turntable
- Fully hydraulic controls
with bi-directional levers on the basket
- Fully hydraulic controls at ground level
installed on the turret base
- Outreach controlled by an hydraulic limit switch
- Engine Start/Stop control from basket
- Anti slip aluminium deck
- Innovative fully aluminium basket or standard glass
filled nylon base with fiberglass frame
- 60° Right + 60° Left hydraulic rotating basket
- Automatic basket levelling
by hydraulic parallelogram
- N° 4 hydraulic straight down outriggers (HS type)
with ground pressure sensors
- 230 V AC CE Electric socket in the basket
- Hour meter
- Standard boom colour
blue (RAL 5017) or white (RAL 9003)

AVAILABLE OPTIONS

- Working light in the basket
- 230V AC EC electric socket in the basket
- 12V or 24V electric system

DIMENSIONS

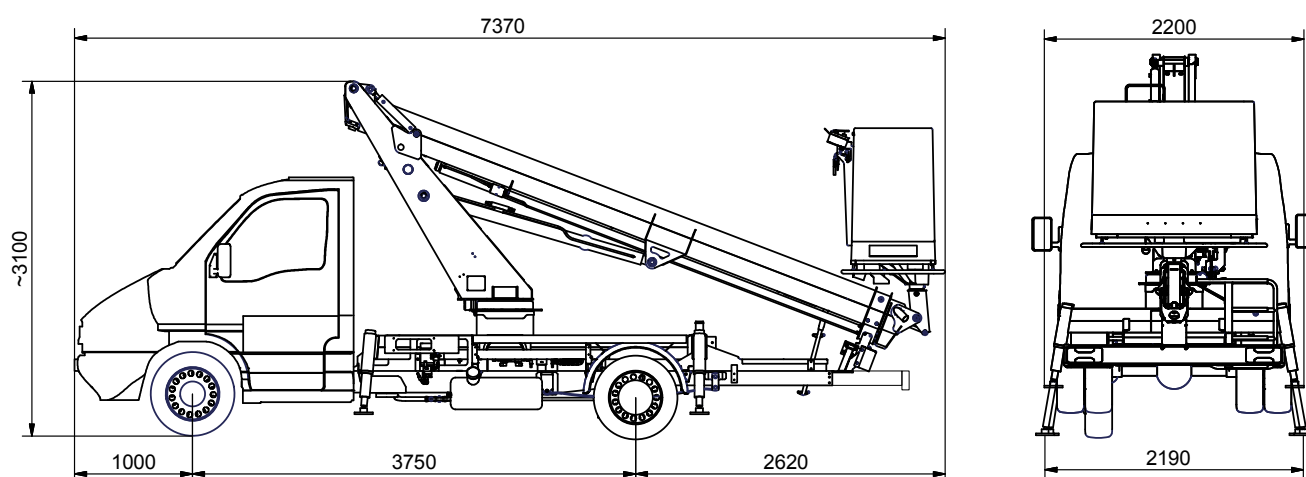

TELESCOPIC TRUCK MOUNTED PLATFORM SPECIFICATION

CTEB-LIFT 150 HY

PERFORMANCE



14,5 m*



250 kg



1400x700x1100
mm



6 m*




12,5 m

GVW min 5,0 t

* outreach and height max values and repeatability
can change within $\pm 3\%$ due to
manufacturing variation and working condition.

WORKING ENVELOPE

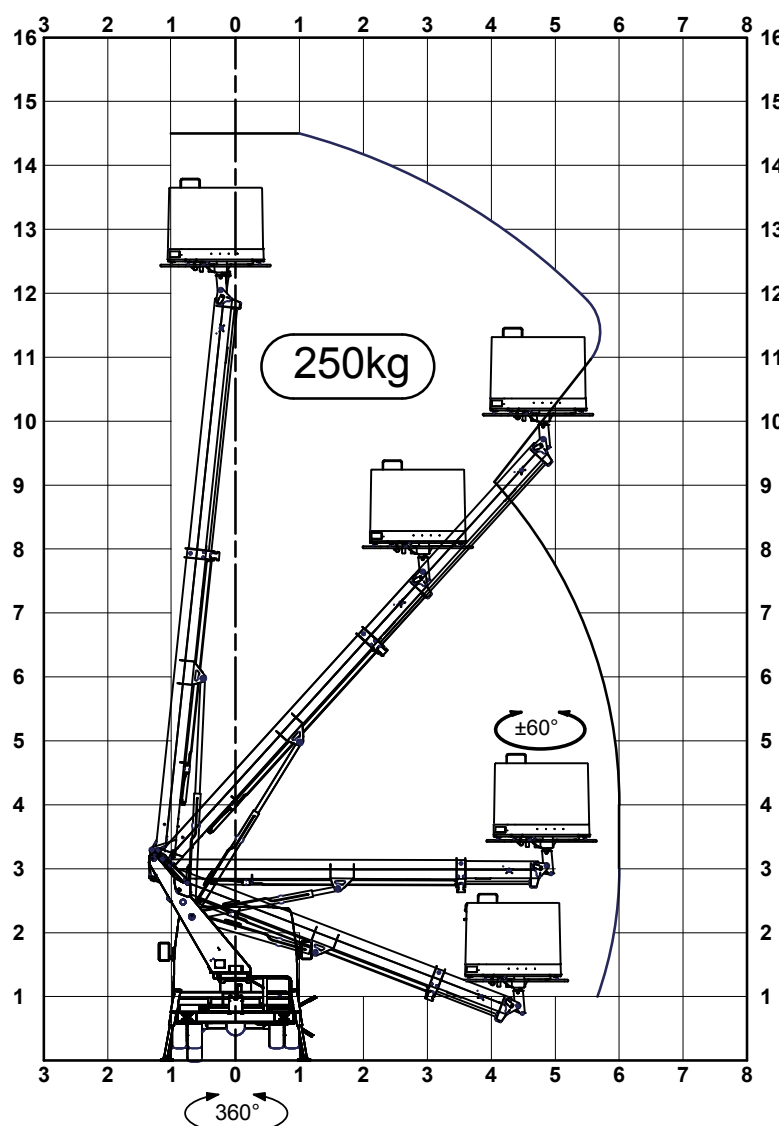

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only. B-LIFT 150 HY - ed. 09/17



CTE S.p.A.
Headquarter

7 Via Caproni - Rovereto (TN) IT, 38068
Ph. +39 0464 48.50.50 - **Fax** +39 0464 48.50.99
info@ctelift.com - **www.ctelift.com**

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

