

TELESCOPIC TRUCK MOUNTED PLATFORM SPECIFICATION

CTEB-LIFT 150 HY


TECHNICAL DATA

- Telescopic boom
(2 elements: main boom + 1 telescopic extension)
- $\pm 320^\circ$ turret rotation on bearing turntable
- Fully proportional hydraulic controls in the basket
- Hydraulic controls from the ground,
installed on the turret base
- Outreach controlled by an hydraulic limit switch
- Engine start/stop control from the basket
- Innovative fully aluminium basket or standard glass
filled nylon base with fiberglass frame
- 60° right + 60° left hydraulic rotating basket
- Automatic basket levelling by hydraulic parallelogram
- Emergency manual pump
- Nr. 04 hydraulic outriggers HS type (straight down)
- Basket dimension: 1400x700x1100 mm
- Electrical and hydraulic hoses
installed in the interior booms
- 100 Lt. oil tank

AVAILABLE OPTIONS

- 12V or 24V electric system
- Working light in the basket
- 230V AC EC electric socket in the basket

DIMENSIONS

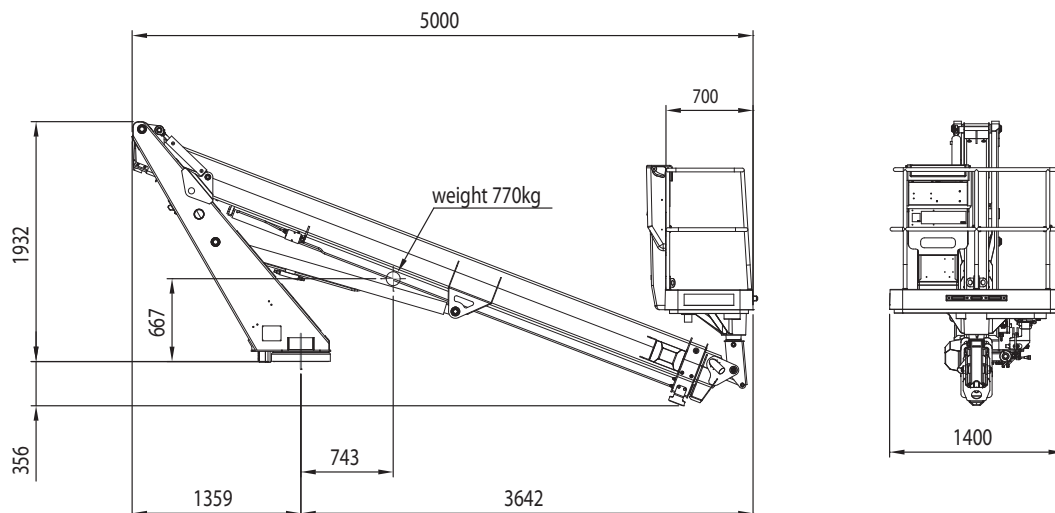

TELESCOPIC TRUCK MOUNTED PLATFORM SPECIFICATION

CTEB-LIFT 150 HY

PERFORMANCE



15 m*



250 kg



1400x700x1100
mm



9 m*




13 m

GVW min 5 t

* outreach and height max values and repeatability
can change within $\pm 3\%$ due to
manufacturing variation and working condition.

WORKING ENVELOPE

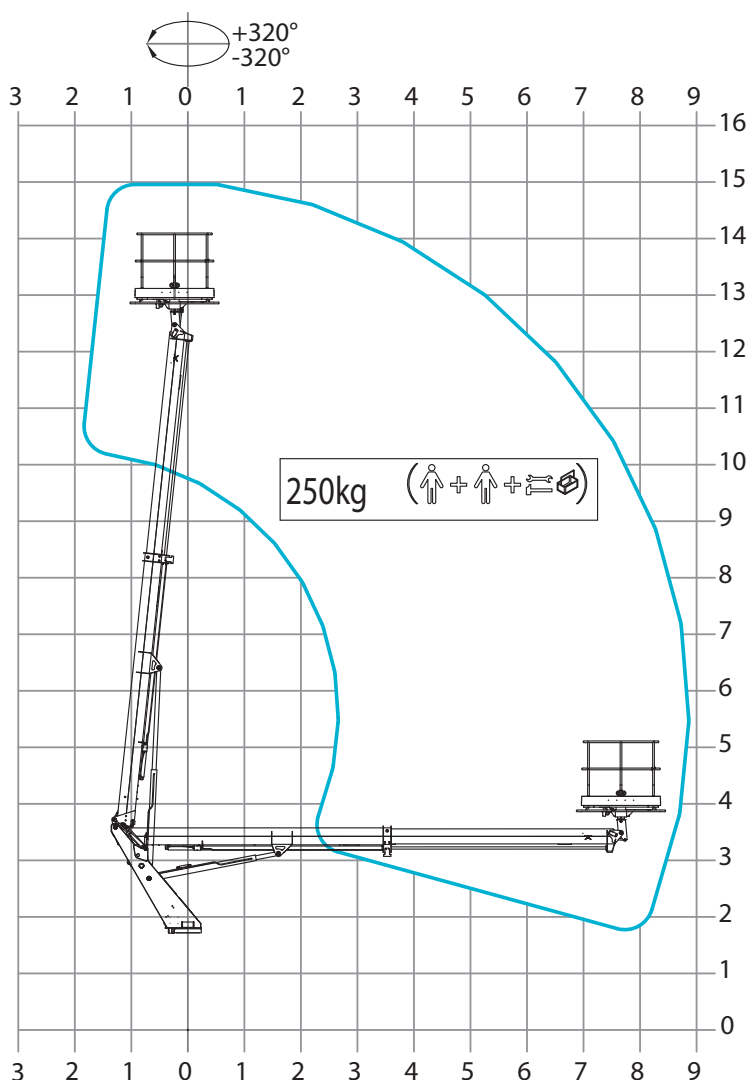

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only. B-LIFT 150 HY - ed. 02/19



CTE S.p.A.
Headquarter

7 Via Caproni - Rovereto (TN) IT, 38068
Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99
info@ctelift.com - www.ctelift.com

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

