

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION




TECHNICAL DATA

- Double pantograph + telescopic boom with single extension
- Sigma boom movement enabled by connecting rods
- $\pm 310^\circ$ turret rotation on bearing turntable
- Proportional electro-hydraulic controls from the ground and in the basket
- Smooth proportional controls with acceleration and deceleration ramps
- Engine start and stop controls from basket and ground
- Basket base in composite material with aluminium guardrails
- $60^\circ + 60^\circ$ hydraulic basket rotation
- Automatic hydraulically actioned basket levelling
- Nr. 4 (four) hydraulic outriggers HS + HS/straight down type
- Electric system: 12V or 24V (both on demand)
- Emergency manual pump
- 230V AC EC electrical socket in the basket
- Hour meter
- Standard boom colours: blue (RAL 5017) or white (RAL 9010)
- Hydraulic system operated by vehicle's PTO

AVAILABLE OPTIONS

- 12 or 24V working light
- VTR fiberglass basket

DIMENSIONS

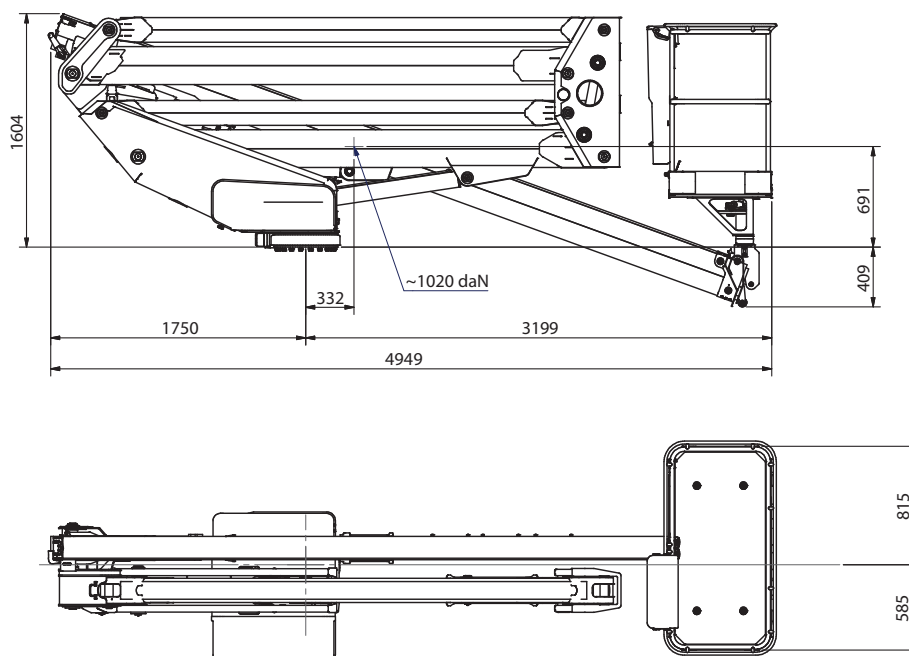

CTE S.p.A.

Headquarter

7 Via Caproni - Rovereto (TN) IT, 38068

Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99

info@ctelift.com - www.ctelift.com

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION



PERFORMANCE



20 m*



200 kg



1400x700x1100 mm



8,80 m*




18 m

GVW min 5,0 t

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

WORKING ENVELOPE

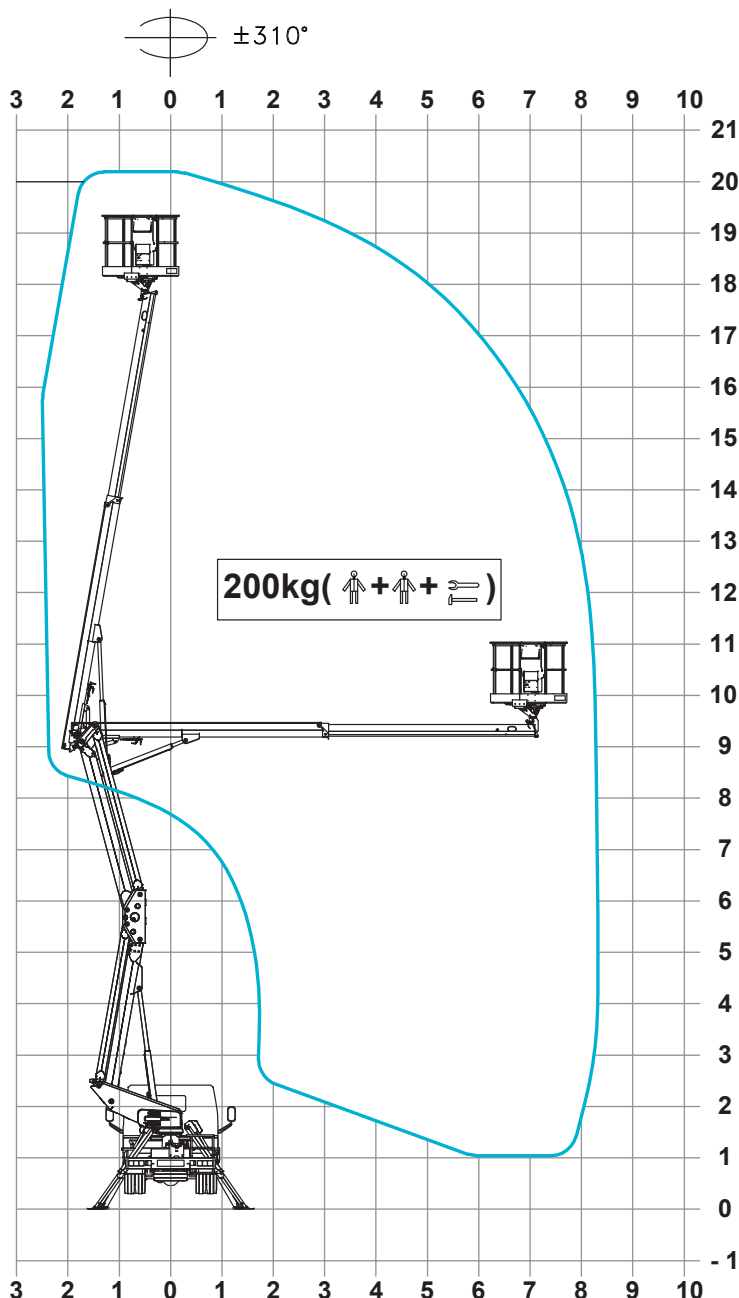

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only. _ZED 20.3 - ed. 12/18



CTE S.p.A.
Headquarter
 7 Via Caproni - Rovereto (TN) IT, 38068
 Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99
 info@ctelift.com - www.ctelift.com
Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010
CTE UK Ltd Enderby Leicestershire - UK

