

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION

CTEZED 21.3 JH


TECHNICAL DATA

- Double pantograph + telescopic boom with single extension + jib
- $\pm 320^\circ$ on bearing turntable, for a total rotation of 640°
- Sigma boom movement enabled by connecting rods
- Proportional electro-hydraulic controls from basket and ground
- Smooth proportional controls
- Basket dimensions: 1400x700x1110mm
- Basket rotation $\pm 90^\circ$
- Basket in aluminium. As an alternative with base in composite material with fiberglass guard-rails (optional on demand. In the case the basket lift capacity will be 200 kg)
- Nr. 4 (four) hydraulic outriggers HS+HS straight down type
- Automatic hydraulically actioned basket levelling
- Electric system: 12V or 24V
- Emergency manual pump
- 230V AC EC electrical socket in the basket
- Standard boom colours: blue (RAL 5017) or white (RAL 9010)
- Load cell
- Engine start and stop controls from basket and ground
- Hydraulic system operated by vehicle's PTO
- Sigma boom offering ZERO TAILSWING in working position at 90°

AVAILABLE OPTIONS

- CAN BUS electronic management system
- 12 or 24V working light
- Hour meter

DIMENSIONS

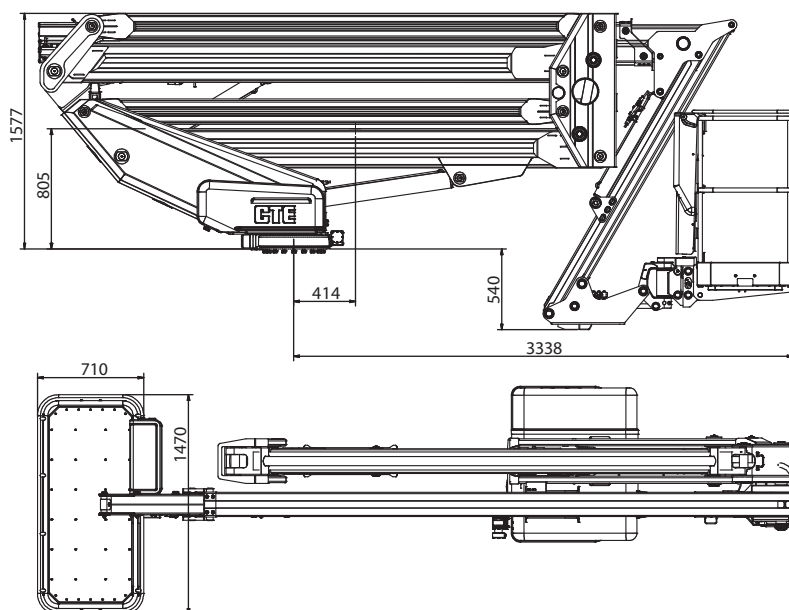

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION

CTEZED 21.3 JH

PERFORMANCE



21 m*



250 kg**



1400x700x1100
mm



9,60 m*



19 m


GVW min

7,5 t

* outreach and height max values and repeatability
can change within $\pm 3\%$ due to
manufacturing variation and working condition.

** 200 kg with fiberglass basket

WORKING ENVELOPE

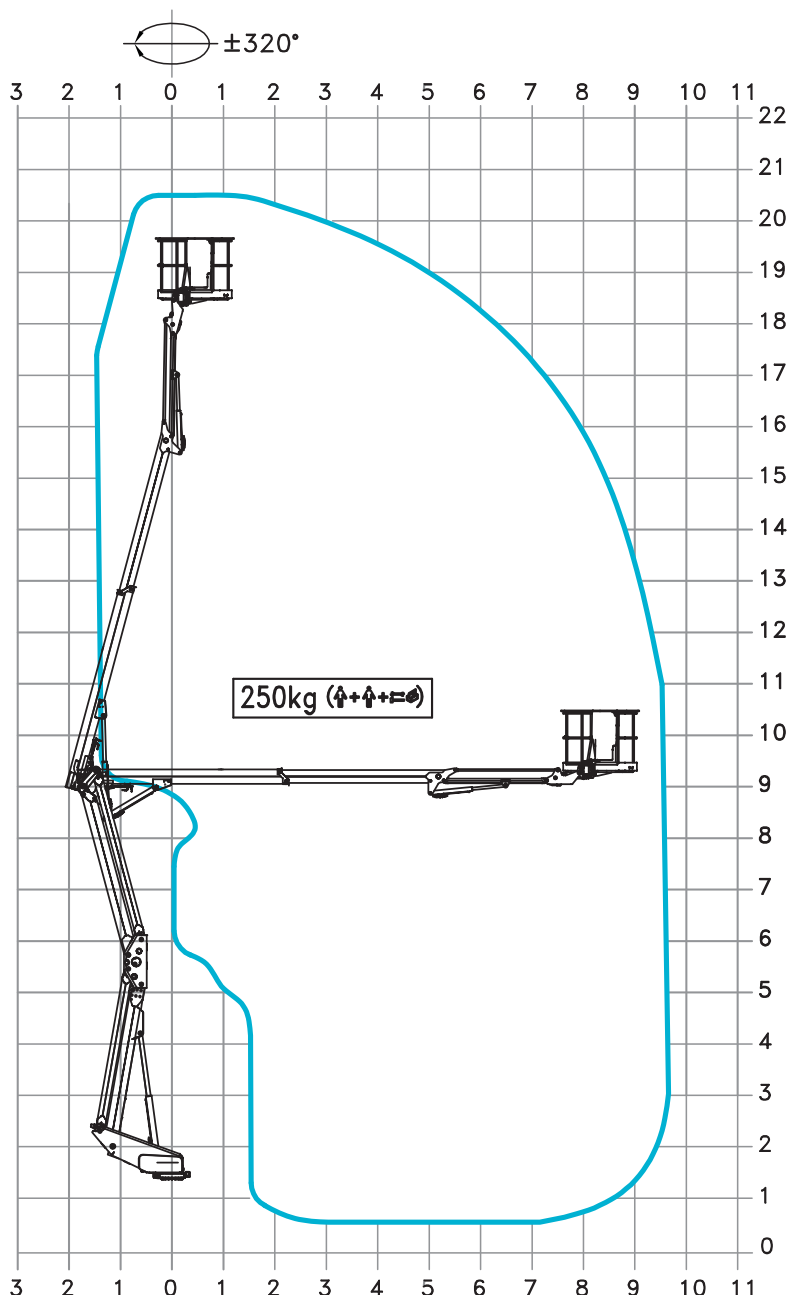

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only. _ZED 21.3 JH - ed. 02/19



CTE S.p.A.
Headquarter

7 Via Caproni - Rovereto (TN) IT, 38068
Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99
info@ctelift.com - www.ctelift.com

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

