

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION

CTEZED 25 HY


TECHNICAL DATA

- Double pantograph + telescopic boom with 2 extensions
- Proportional electrohydraulic controls in basket and ground
- Engine start and stop controls from basket and ground
- Aluminium basket 1400x700x1100 mm
- 90° + 90° hydraulic basket rotation
- $\pm 320^\circ$ turret rotation
- Hydraulically actioned basket levelling
- Electric system: 12V or 24V
- 4 hydraulic outriggers narrow straight down type (HS+HS)
- 230V AC electrical socket in the basket
- Load cell
- Moment limiting system controlling the outreach
- Hour meter

AVAILABLE OPTIONS

- Basket in VTR fiberglass
- 12 or 24V working light


DIMENSIONS

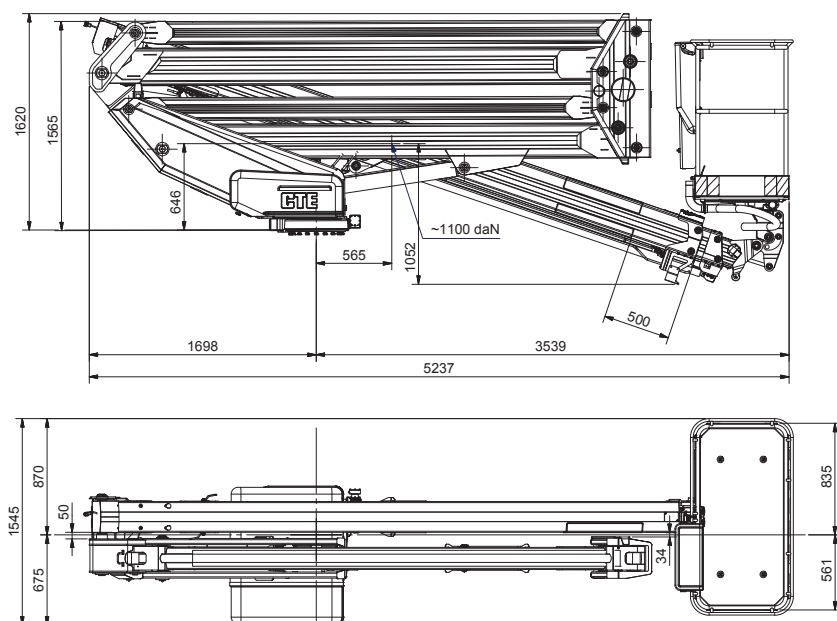

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION

CTEZED 25 HY


PERFORMANCE

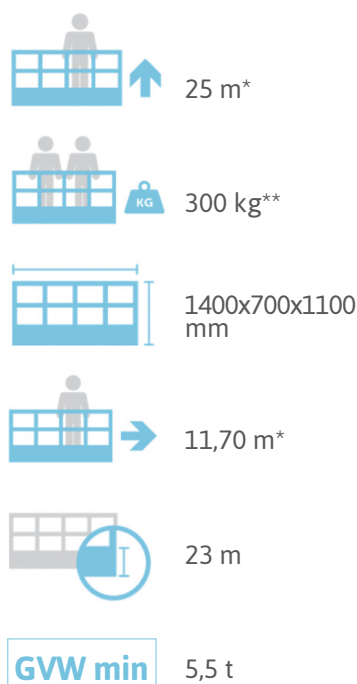

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

** 200 kg with fiberglass basket

WORKING ENVELOPE

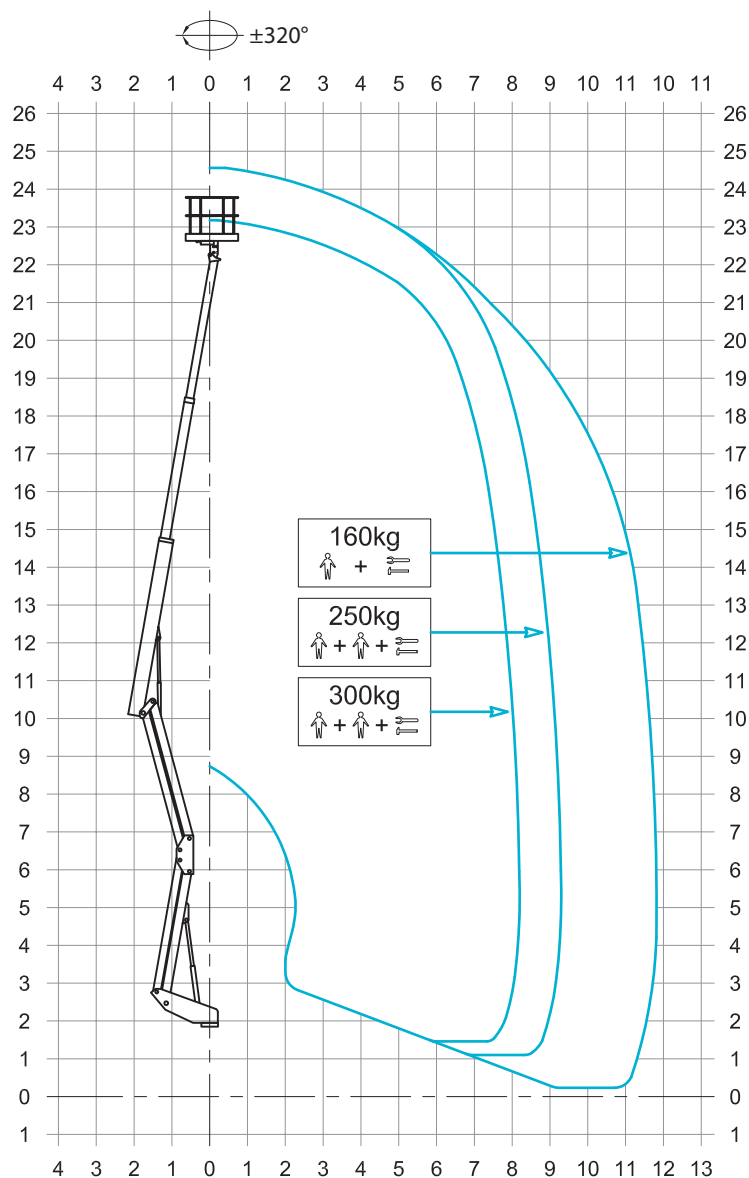

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only. _ZED 25 HY - ed. 04/22



CTE S.p.A.

Headquarter 7 Via Caproni - Rovereto (TN) IT, 38068

Ph. +39 0464 48.50.50 - info@ctelift.com - www.ctelift.com

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

2 Via E. Fermi - Affi (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

