

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION




TECHNICAL DATA

- Double pantograph + telescopic boom with 2 extensions
- Sigma boom movement enabled by connecting rods
- Proportional electrohydraulic controls in basket and ground
- Engine start and stop controls from basket and ground
- Aluminium basket 1400x700x1100 mm
- 90° + 90° hydraulic basket rotation
- +/- 320° Turret rotation, for a total rotation of 640°
- Automatic hydraulically actioned basket levelling
- Electric system: 12V or 24V
- 4 hydraulic outriggers narrow straight down type (HS+HS)
- 230V AC EC electrical socket in the basket
- Grounded control station
- Load cell on/off
- System to automatically limit the outreach depending on the weight in the basket
- Hydraulic system operated by vehicle's PTO

AVAILABLE OPTIONS

- Basket in VTR fiberglass
- 12 or 24V working light
- Hour meter
- Buzzer indicating PTO engaged

DIMENSIONS

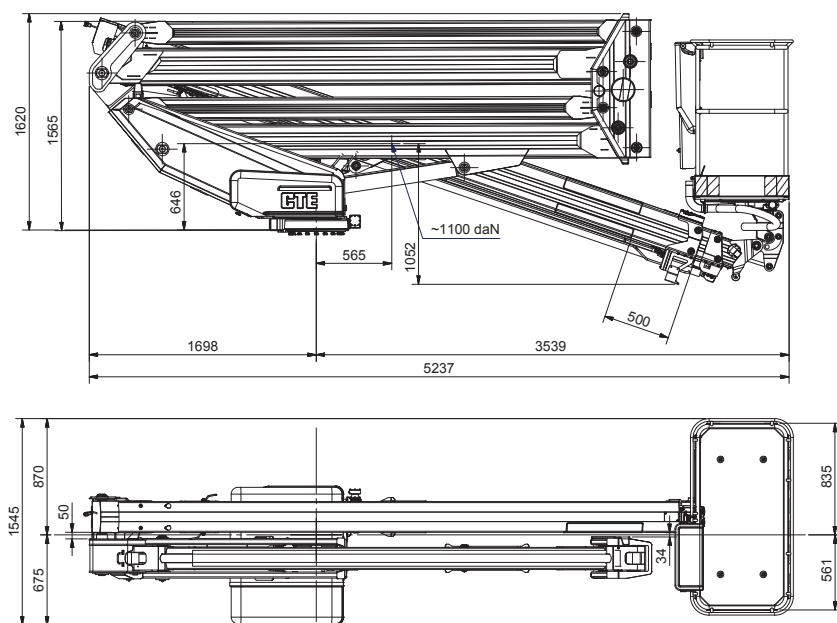

CTE S.p.A.

Headquarter

7 Via Caproni - Rovereto (TN) IT, 38068

Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99

info@ctelift.com - www.ctelift.com


Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION




PERFORMANCE

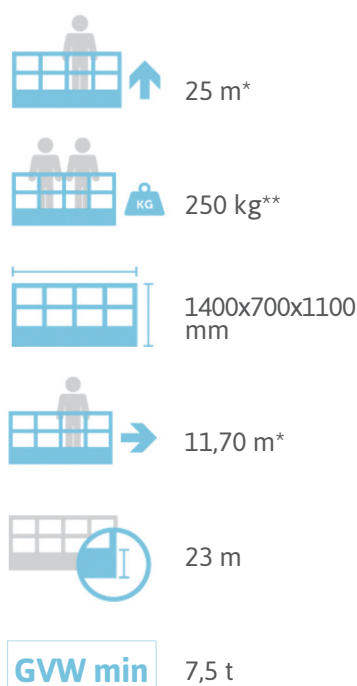

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

** 200 kg with fiberglass basket

WORKING ENVELOPE

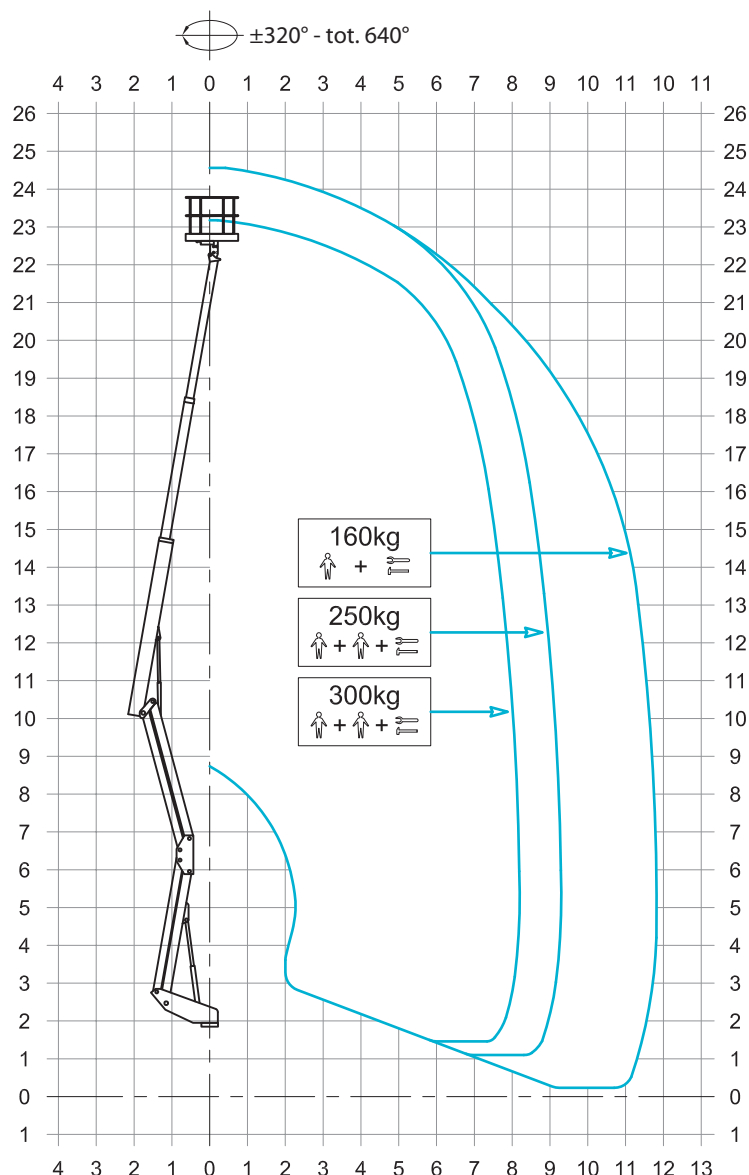

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only _ZED 25 - ed. 01/19



CTE S.p.A.
Headquarter
 7 Via Caproni - Rovereto (TN) IT, 38068
Ph. +39 0464 48.50.50 - **Fax** +39 0464 48.50.99
 info@ctelift.com - www.ctelift.com
Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010
CTE UK Ltd Enderby Leicestershire - UK

