

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION




TECHNICAL DATA

- Double pantograph + telescopic boom (main boom + two extensions) + jib
- Sigma boom movement enabled by connecting rods
- 360° continuous turret rotation on bearing turntable
- Proportional, electrohydraulic controls in basket and ground
- Engine start and stop controls from basket and ground
- Aluminium basket; as an alternative with Fiberglass basket (in this case we have to reduce the lift capacity and depending on the type of installation the outreach)
- 65° right + 65° left hydraulic basket rotation
- Automatic hydraulically actioned basket levelling
- Nr. 4 hydraulic outriggers HS+HS/straight down type
- Basket load sensing device
- Electric system 12V or 24V
- Emergency manual pump
- 230V AC EC electrical socket in the basket
- Standard boom colours: blue (RAL 5017) or white (RAL 9010)

AVAILABLE OPTIONS

- Basket in VTR fiberglass
- 24V working light
- Nr. 4 hydraulic outriggers A+A type
- Hour meter

DIMENSIONS

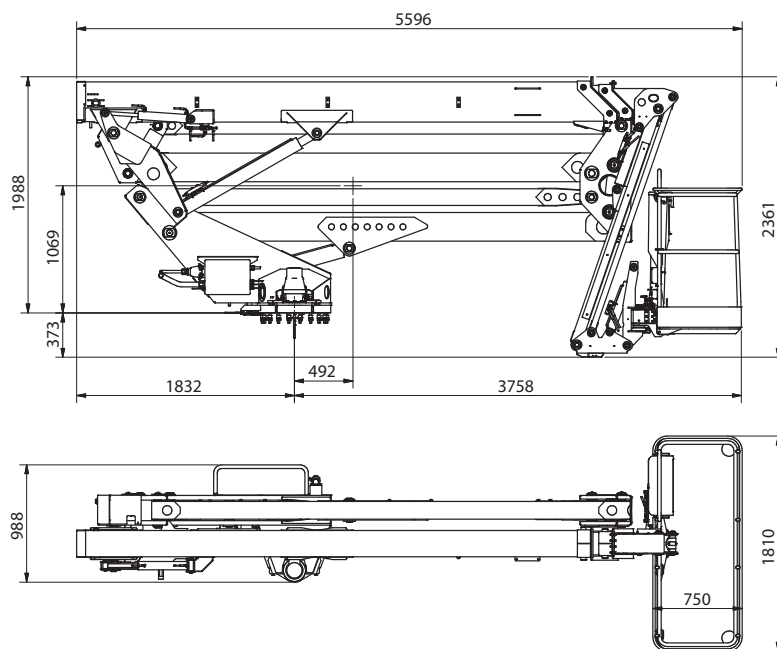

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION



PERFORMANCE



26 m*



230 kg**



1400x700x1100 mm



14,00 m



24 m




GVW min 9/10 t

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

** 200 kg with fiberglass basket

WORKING ENVELOPE

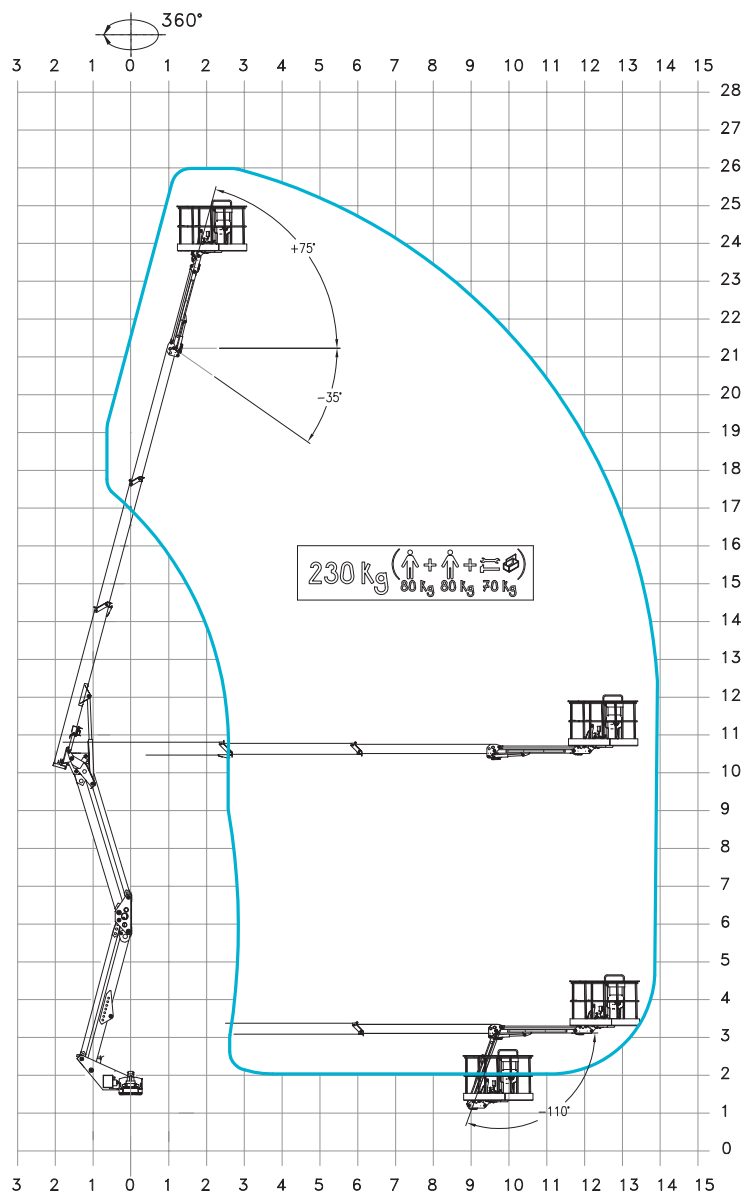

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only. _ZED 26 J - ed. 02/19



CTE S.p.A.
Headquarter
7 Via Caproni - Rovereto (TN) IT, 38068
Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99
info@ctelift.com - www.ctelift.com
Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010
CTE UK Ltd Enderby Leicestershire - UK

