

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION




TECHNICAL DATA

- Articulated boom (two elements) + telescopic arm with two (02) extension
- 360° continuous turret rotation on bearing turntable
- Proportional electro-hydraulic controls from the ground and in the basket
- Engine start/stop controls from the basket and from the turret
- Basket dimensions: 1400x700x1100mm
- Basket rotation +/- 65°
- Basket base in composite material with aluminium guard-rails
- Nr. 4 hydraulic outriggers HS + HS/straight down type
- Automatic hydraulically actioned levelling basket
- Electric system: 12V or 24V
- Emergency manual pump
- 230V AC EC electrical socket in the basket
- Standard boom colours: blue (RAL 5017) or white (RAL 9010)
- Sigma boom movement enabled by connecting rods

AVAILABLE OPTIONS

- Basket in VTR fiberglass
- 24V working light
- Load cell in the basket
- Nr. 4 hydraulic outriggers A+A type
- Hour meter



DIMENSIONS

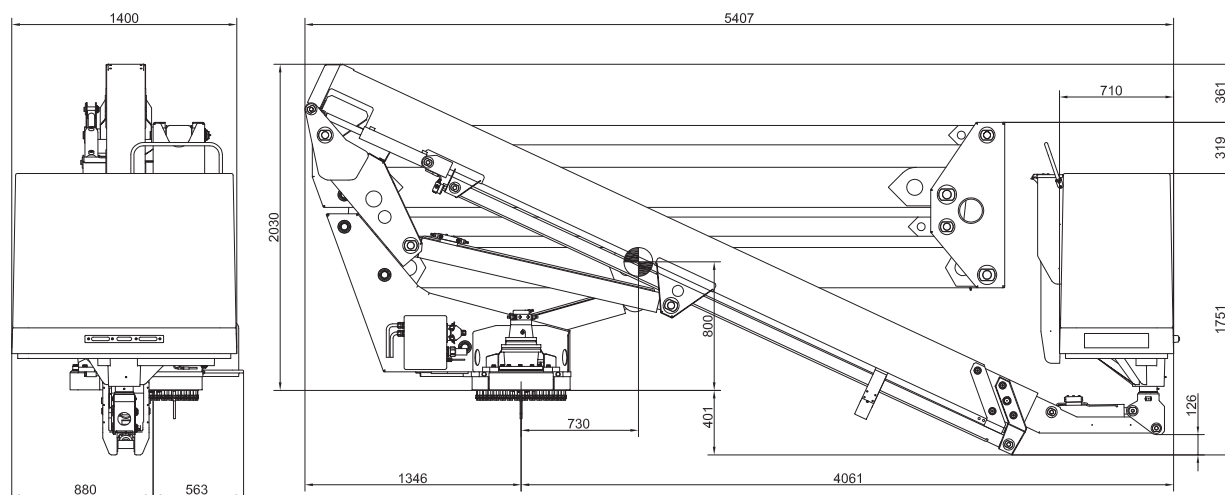

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION




PERFORMANCE



* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

WORKING ENVELOPE

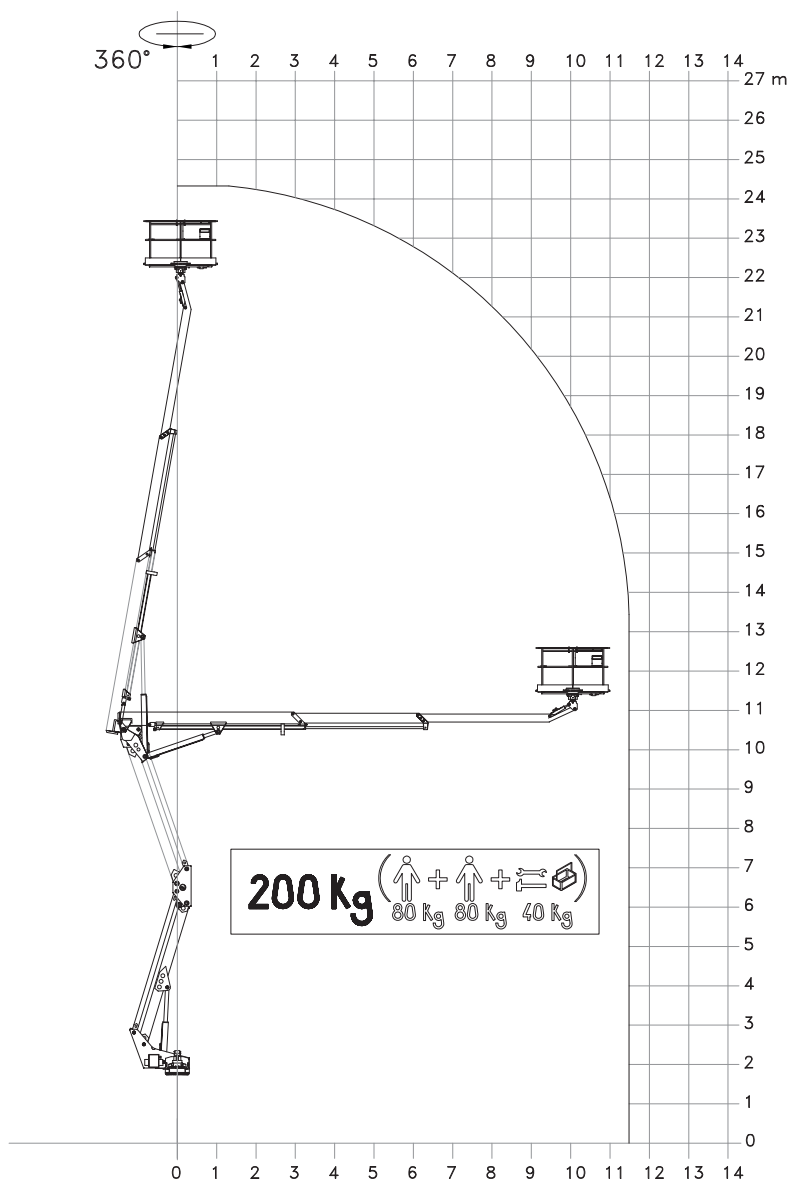

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only _ZED 26 - ed. 12/18



CTE S.p.A.
Headquarter
 7 Via Caproni - Rovereto (TN) IT, 38068
 Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99
 info@ctelift.com - www.ctelift.com
Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010
CTE UK Ltd Enderby Leicestershire - UK

