

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION




TECHNICAL DATA

- Articulated boom (two elements) + telescopic arm with two (02) extension
- 360° continuous turret rotation
- Proportional electro-hydraulic controls from the ground and in the basket
- Engine start/stop controls from the basket and from the turret
- Basket dimensions: 1400x700x1100mm
- Basket rotation +/- 60°
- Glass filled nylon base with aluminium guard rail
- Nr. 4 hydraulic outriggers HS + HS/straight down type
- Hydraulically actioned levelling basket
- Electric system: 12V or 24V
- Emergency manual pump
- 230V AC electrical socket in the basket
- Standard boom colours: blue (RAL 5017) or white (RAL 9010)
- Hour meter

AVAILABLE OPTIONS

- Basket in VTR fiberglass
- 24V working light
- Load cell
- Nr. 4 hydraulic outriggers A+A type

DIMENSIONS

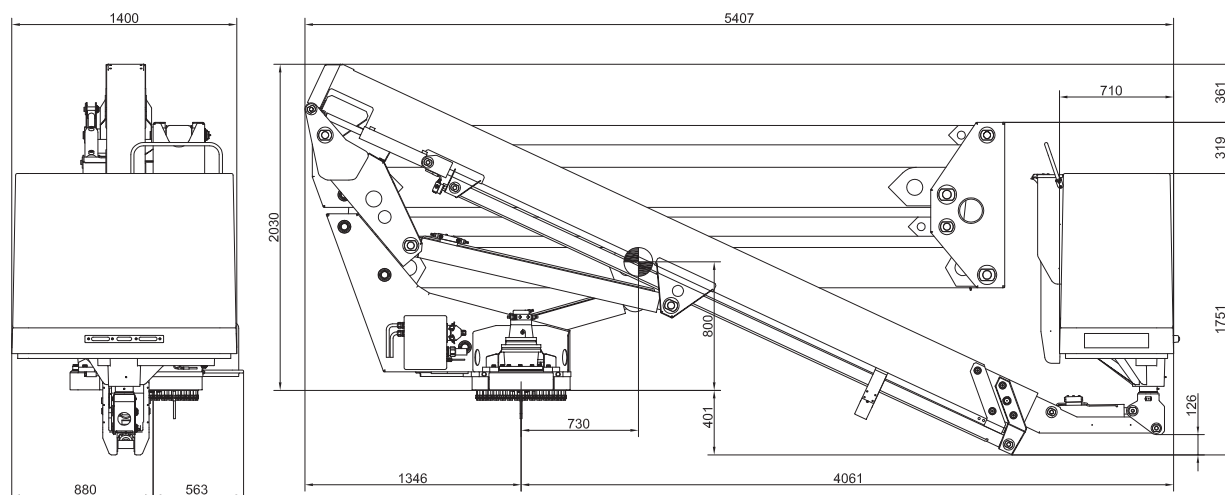

CTE S.p.A.

Headquarter 7 Via Caproni - Rovereto (TN) IT, 38068

Ph. +39 0464 48.50.50 - info@ctelift.com - www.ctelift.com

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

2 Via E. Fermi - Affi (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION



PERFORMANCE



26 m* / 25 m* (VTR)



200 kg



1400x700x1100 mm



12,00 m* / 11,50 m* (VTR)




24 m / 23 m (VTR)



GVW min 8,5 t

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

WORKING ENVELOPE

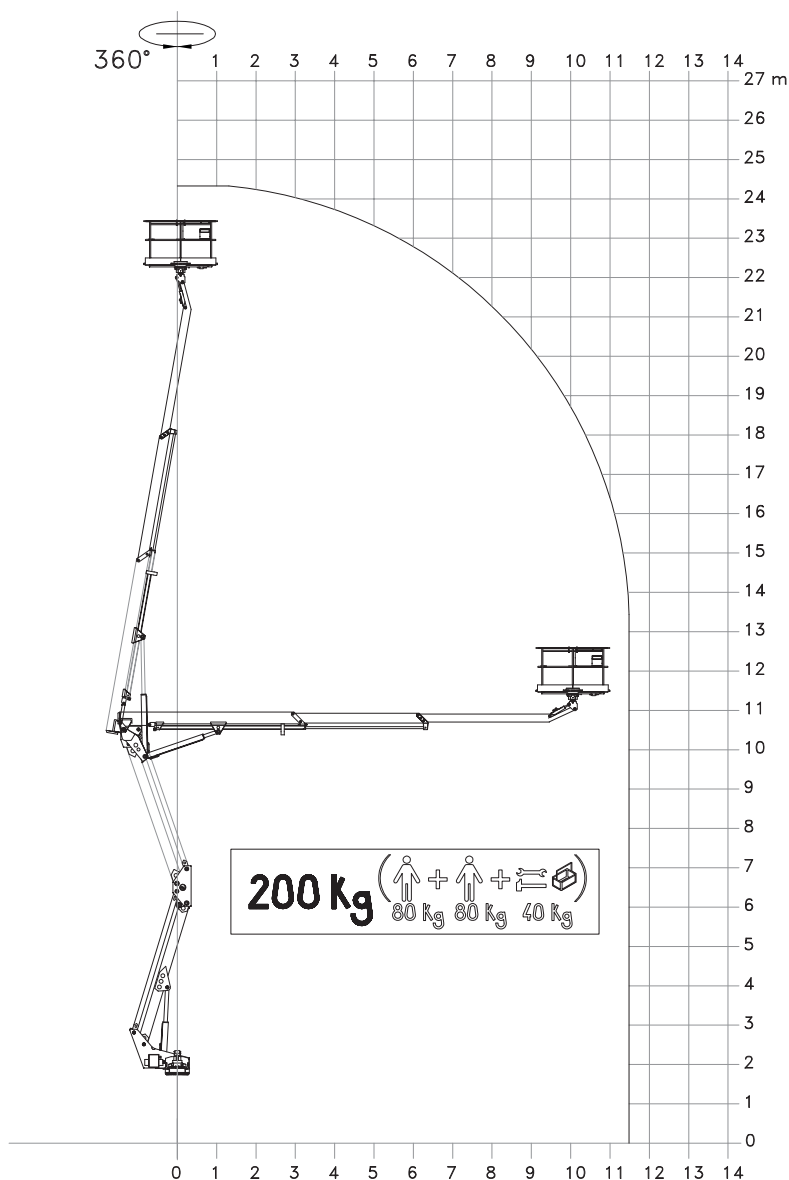

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only _ZED 26 - ed. 04/22



CTE S.p.A.

Headquarter 7 Via Caproni - Rovereto (TN) IT, 38068

Ph. +39 0464 48.50.50 - info@ctelift.com - www.ctelift.com

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

2 Via E. Fermi - Affi (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

