

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION




TECHNICAL DATA

- Articulated boom (two elements)
 - + telescopic boom (main boom + two extension)
- 360° turret rotation on bearing turntable
- Proportional electro-hydraulic controls in the basket
- Electrohydraulic controls from the ground
- Engine start/stop control
 - from the basket and from the ground
- Standard glass filled nylon base with aluminium frame
- 60° right + 60° left hydraulic rotating basket
- Basket levelling by hydraulic parallelogram
- Emergency manual pump
- 12V or 24V electric system available
- Nr. 04 hydraulic outriggers HS type (straight down)
- Basket dimension: 1400x700x1100 mm
- Hourmeter

AVAILABLE OPTIONS

- Glass filled nylon base with fibreglass frame
- Working light in the basket
- 230V AC electric socket in the basket
- Basket load sensing device

DIMENSIONS

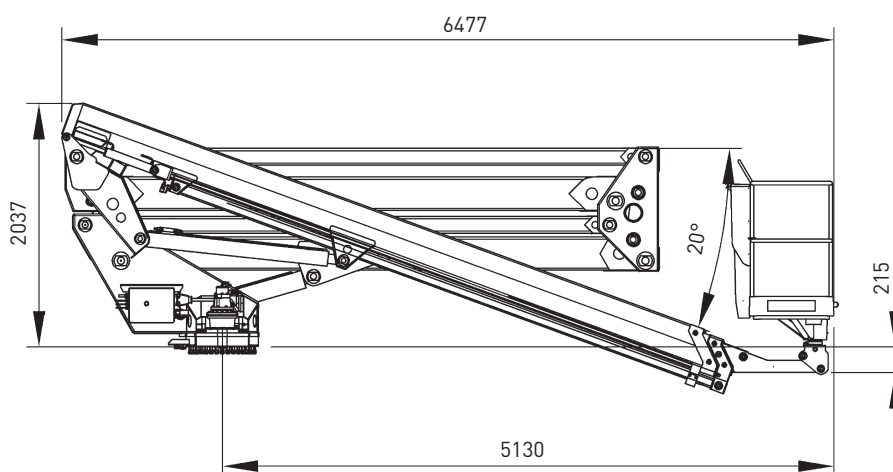

CTE S.p.A.

Headquarter 7 Via Caproni - Rovereto (TN) IT, 38068

Ph. +39 0464 48.50.50 - info@ctelift.com - www.ctelift.com

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

2 Via E. Fermi - Affi (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION



PERFORMANCE



29 m*



250 kg



1400x700x1100 mm



15 m*




27 m

GVW min 12 t

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

WORKING ENVELOPE

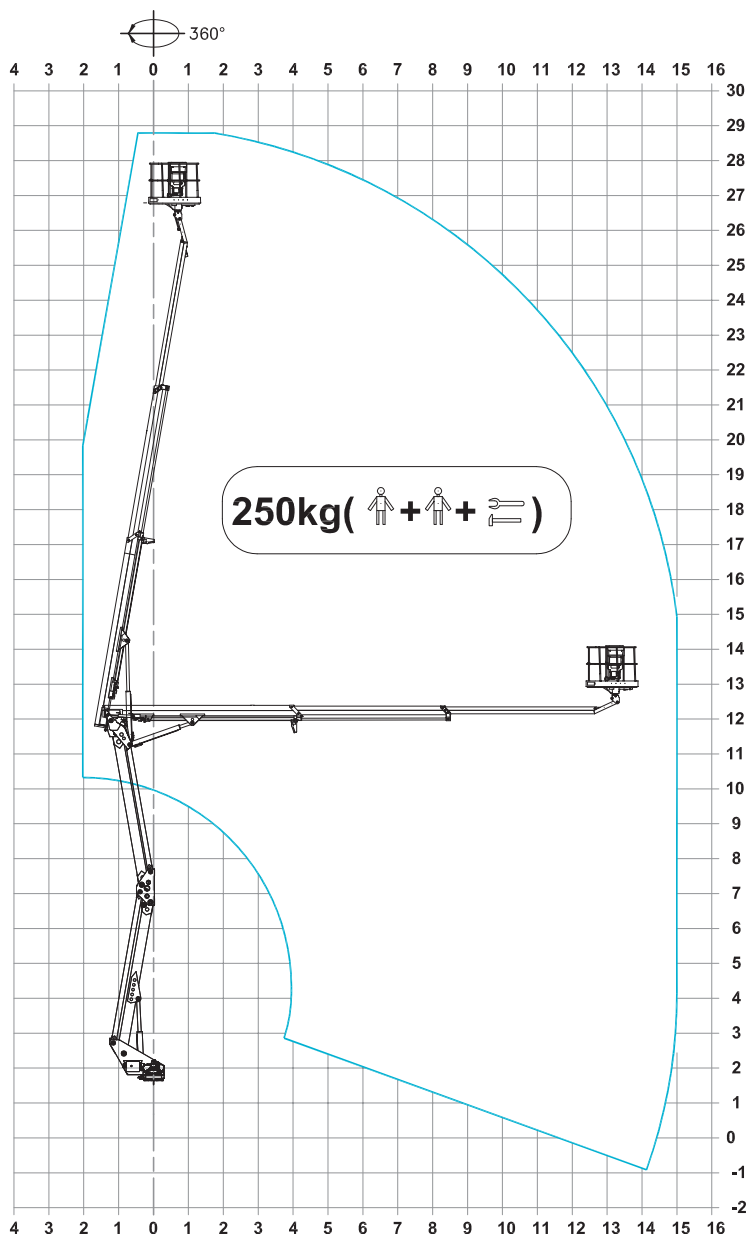

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only _ZED 29 - ed. 04/22



CTE S.p.A.

Headquarter 7 Via Caproni - Rovereto (TN) IT, 38068

Ph. +39 0464 48.50.50 - info@ctelift.com - www.ctelift.com

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

2 Via E. Fermi - Affi (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

