

TELESCOPIC TRUCK MOUNTED PLATFORM SPECIFICATION




TECHNICAL DATA

- Articulated boom (two elements)
 - + telescopic arm with two (02) extension
- Sigma boom movement enabled by connecting rods
- 360° continuous turret rotation on bearing turntable
- Proportional electro-hydraulic controls from the ground and in the basket
- Engine start/stop controls from the basket and from the turret
- Basket rotation +/- 65°
- Basket base in composite material with aluminium guard-rails, dimensions: 1400x700x1100mm
- Nr. 4 (four) hydraulic outriggers HS + HS straight down type or as an alternative A+A type (on demand)
- Automatic hydraulically actioned levelling basket
- Electric system: 12V or 24V
- Emergency manual pump
- Hydraulic system operated by vehicle's PTO
- 230V AC EC electrical socket in the basket
- Hour meter
- Standard boom colours: blue (RAL 5017) or white (RAL 9010)

AVAILABLE OPTIONS

- 12 or 24V working light
- Load cell
- VTR fiberglass basket
- Nr. 4 (four) hydraulic outriggers A+A type

DIMENSIONS

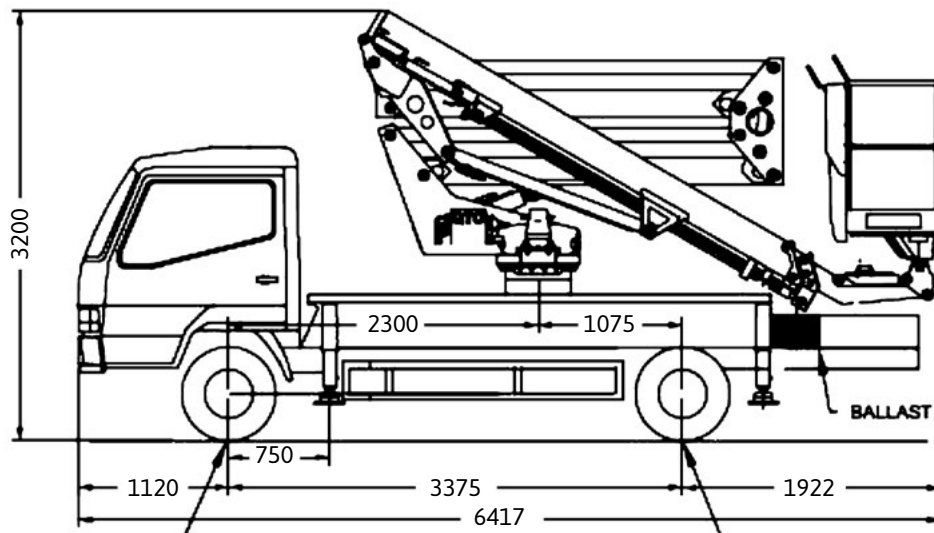

TELESCOPIC TRUCK MOUNTED PLATFORM SPECIFICATION



PERFORMANCE



19,80 m*



200 kg



1400x700x1100 mm



9,50 m*




17,80 m

GVW min 3,5 t

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

WORKING ENVELOPE

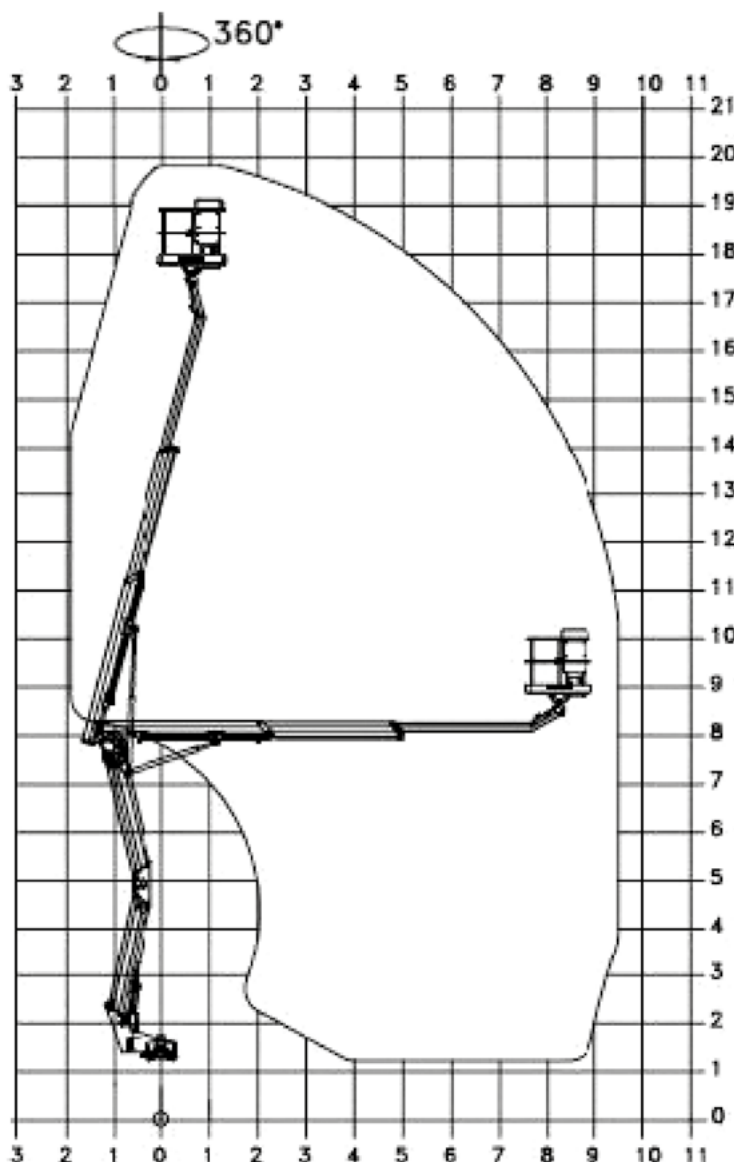

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only. _ZED 20 E - ed. 07/17



CTE S.p.A.
Headquarter

7 Via Caproni - Rovereto (TN) IT, 38068
Ph. +39 0464 48.50.50 - **Fax** +39 0464 48.50.99
info@ctelift.com - **www.ctelift.com**

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK



CTE S.p.A. certified organization
UN EN ISO 9001:2008/11.03.09