

TELESCOPIC TRUCK MOUNTED PLATFORM SPECIFICATION

CTEZED 26 on 8,5 t


TECHNICAL DATA

- Articulated boom (two elements)
+ telescopic arm with three (03) extensions
- Sigma boom movement enabled by connecting rods
- 360° continuous turret rotation on bearing turntable
- Proportional electro-hydraulic controls
from the ground and in the basket
- Engine start/stop controls
from the basket and from the turret
- Basket rotation +/- 65°
- Basket base in composite material with aluminium
guard-rails, dimensions: 1400x700x1100mm
- Nr. 4 (four) hydraulic outriggers HS + HS
straight down type
- Automatic hydraulically actioned levelling basket
- Electric system: 24V
- Emergency manual pump
- Hydraulic system operated by vehicle's PTO
- 230V AC EC electrical socket in the basket
- Hour meter
- Standard boom colours:
blue (RAL 5017) or white (RAL 9010)

AVAILABLE OPTIONS:

- 24V working light
- Load cell
- Fiberglass basket
- Nr. 4 (four) hydraulic outriggers A+A type


DIMENSIONS

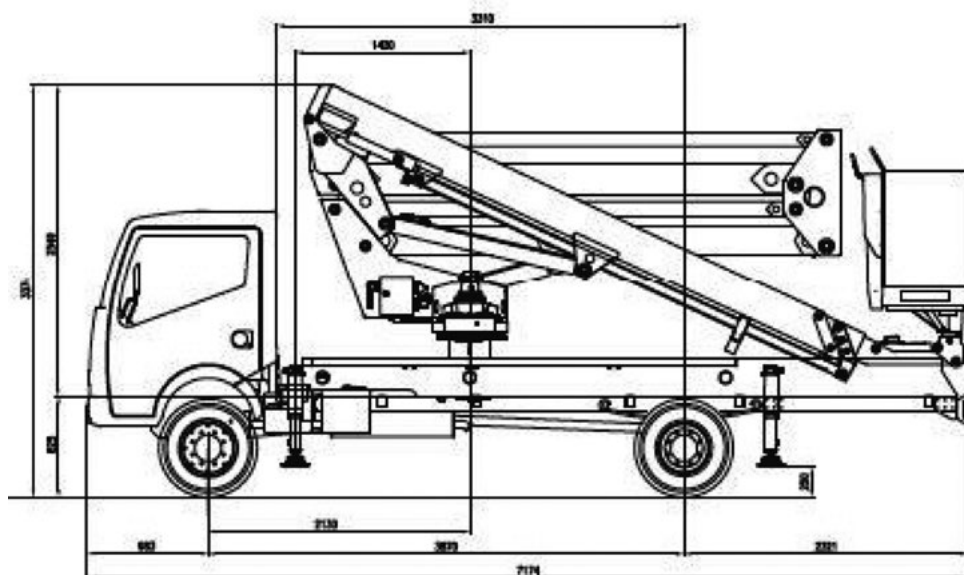


TELESCOPIC TRUCK MOUNTED PLATFORM SPECIFICATION

CTEZED 26 on 8,5 t

PERFORMANCE



WORKING ENVELOPE

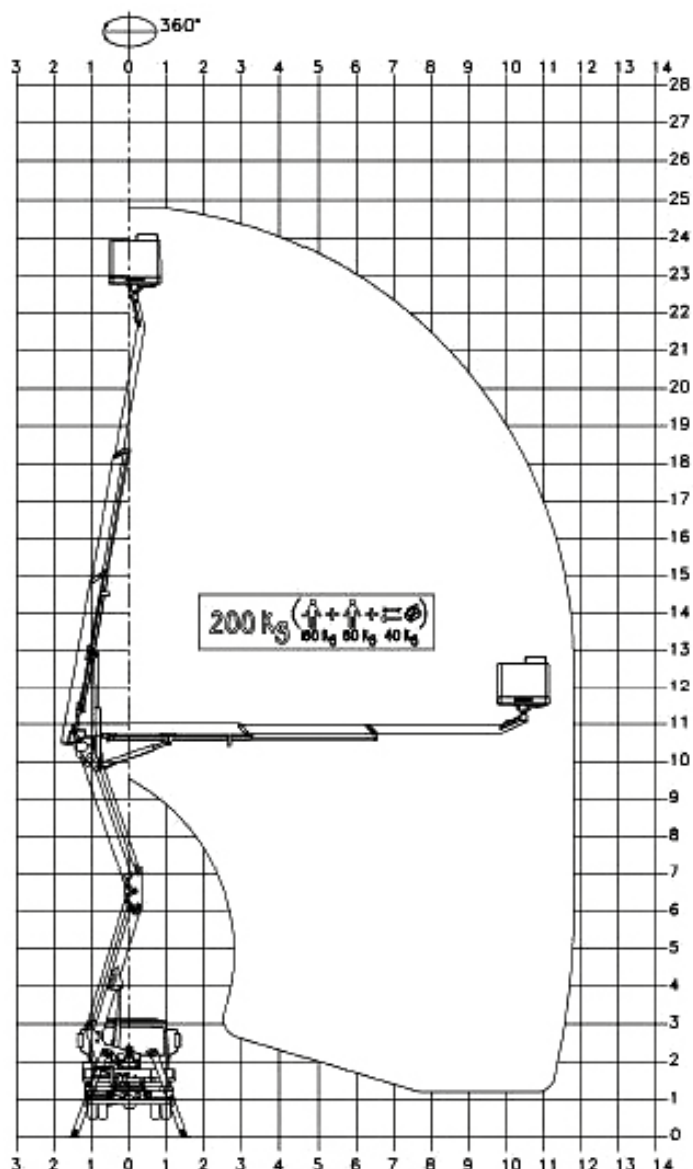

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only _ZED 26 - ed. 07/17



CTE S.p.A.
Headquarter

7 Via Caproni - Rovereto (TN) IT, 38068
Ph. +39 0464 48.50.50 - **Fax** +39 0464 48.50.99
info@ctelift.com - **www.ctelift.com**

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

