

TELESCOPIC TRUCK MOUNTED PLATFORM SPECIFICATION




TECHNICAL DATA

- Double pantograph + telescopic boom (main boom + two extensions)
- Sigma boom movement enabled by connecting rods
- 360° continuous turret rotation on bearing turntable
- Nr. 4 hydraulic outriggers HS+HS straight down type
- Proportional, electrohydraulic controls in basket and ground
- Engine start and stop controls from basket and ground
- Composite basket base with aluminium guardrails, dimensions 1400x700x1100 mm
- 65°right + 65° left hydraulic basket rotation
- Automatic hydraulically actioned basket levelling
- Electric system 24V or 12V
- Emergency manual pump
- Load cell
- 230V AC EC electrical socket in the basket
- Standard boom colours: blue (RAL 5017) or white (RAL 9010)
- Hydraulic system operated by gear pump run from vehicle's PTO

AVAILABLE OPTIONS

- Fiberglass
- 24V working light
- 110V AC EC electric socket in the basket
- Hour meter
- Basket load sensing device
- Anemometer

DIMENSIONS

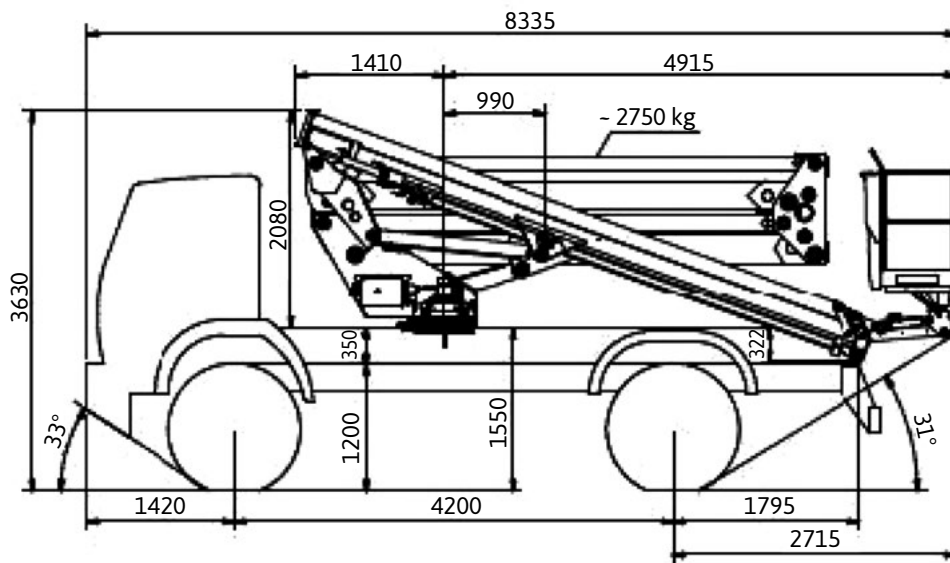

CTE S.p.A.
Headquarter

7 Via Caproni - Rovereto (TN) IT, 38068
Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99
info@ctelift.com - www.ctelift.com

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

TELESCOPIC TRUCK MOUNTED PLATFORM SPECIFICATION



PERFORMANCE



29 m*



250 kg**



1370x700x1100 mm



15 m*




27 m

GVW min 12 t

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

** 200 kg with fiberglass

WORKING ENVELOPE

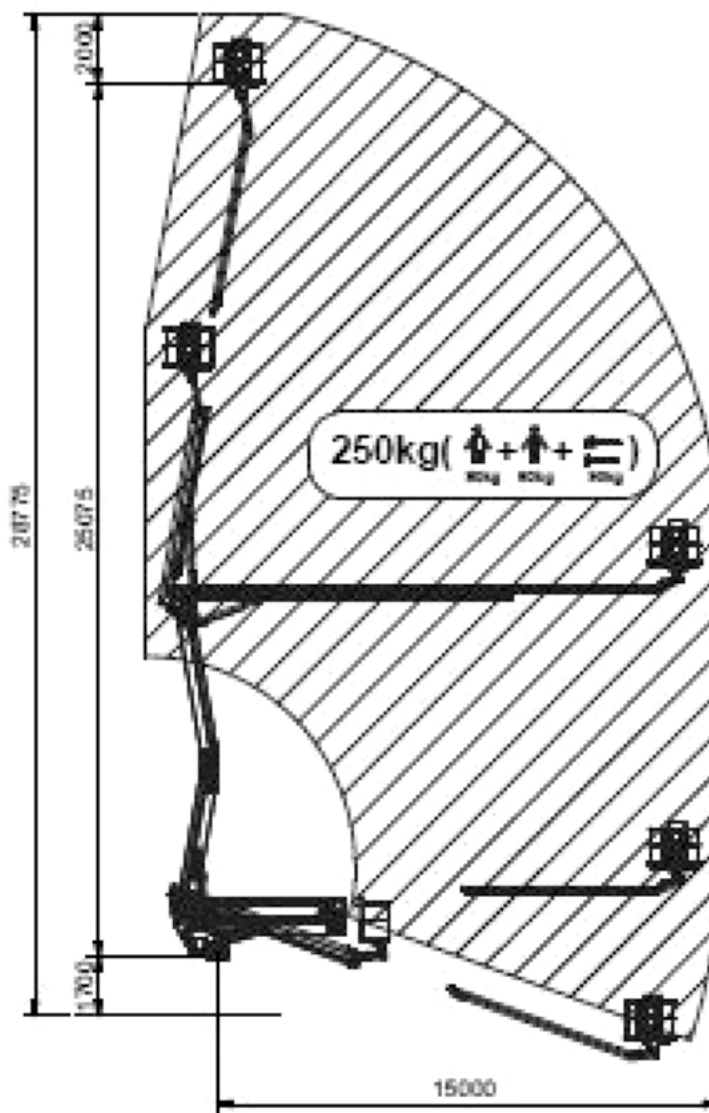

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only _ ZED 29 - ed. 09/17



CTE S.p.A.
Headquarter

7 Via Caproni - Rovereto (TN) IT, 38068
Ph. +39 0464 48.50.50 - **Fax** +39 0464 48.50.99
info@ctelift.com - **www.ctelift.com**

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

