

CTE TRACCESS 200/66

↑ 66 ft

→ 28 ft

👤 550 lb

Ideal for
rental
companies.

Easy to maintain.
Easy to use.
Easy to handle.



CTE TRACCESS 200/66

A 66 ft working height, an impressive outreach of 28 ft, at a 550 lb basket capacity.



watch the video

STRENXTM
PERFORMANCE STEEL



Unrestricted
working area



Becomes vertical
with one command



Impressive 550 lb
basket capacity



Different power
sources available

TECHNICAL DATA

- » Articulated boom (two elements) + telescopic boom (main boom + 1 extension) + jib
- » Sigma boom articulation
- » 320° turret rotation
- » Proportional electrohydraulic controls in basket
- » Engine start and stop controls from basket
- » Aluminum basket available in single (2'6" x 2'3" x 3'7") or double (4'3" x 2'3" x 3'7") personnel sizes
- » 90° right + 90° left hydraulic basket rotation
- » Hydraulic basket leveling
- » Dual drive with a maximum speed of 1 mph
- » Track width extends from 2'6" to 4'2"
- » 12V electric system
- » 9.51 gal hydraulic oil tank
- » Basket capacity controlled by load sensor
- » 4 hydraulic outriggers with ground pressure sensors
- » Hour meter
- » 110 V AC EC electrical socket in the basket
- » Standard boom colours blue (RAL 5017) or white (RAL 9003)
- » Max gradeability 25%
- » 110 V 1.5 Kw auxiliary engine

ENGINES

- » Honda 15 Hp gas engine
- » Kubota diesel engine



ALUMINUM BASKET
WITH LADDER



CABLE PUSHBUTTON




EXPANDABLE TRACK






EQUIPPED WITH JIB

WORKING ENVELOPE


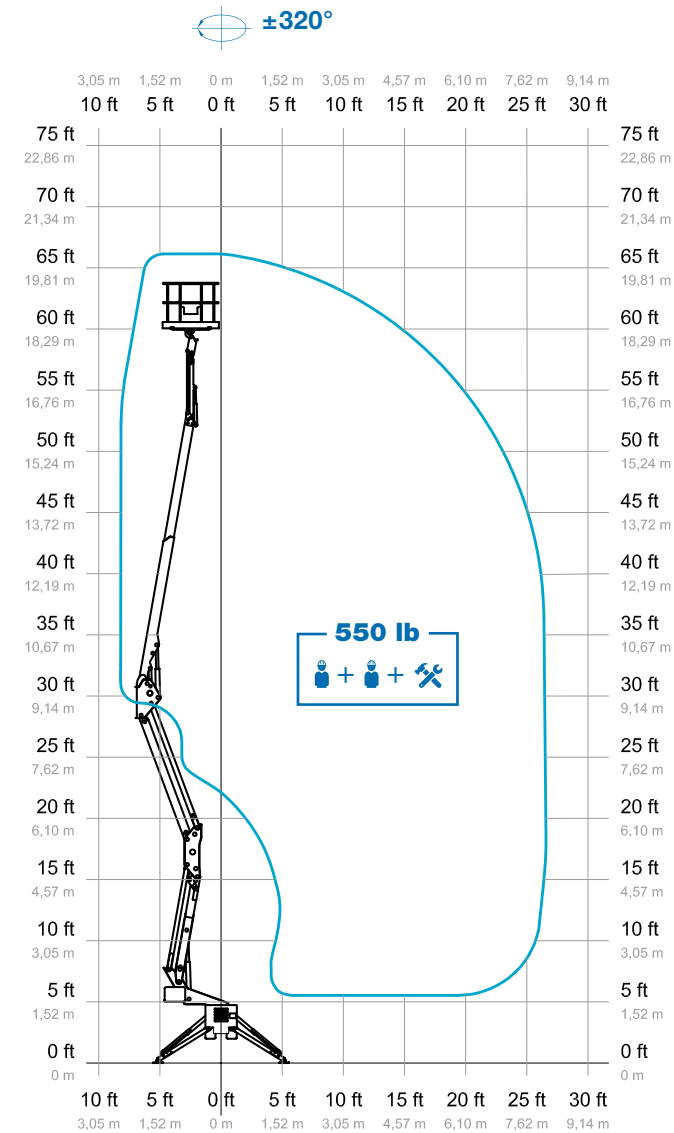


OUTRIGGER FOOTPRINT


Live loads N/m²

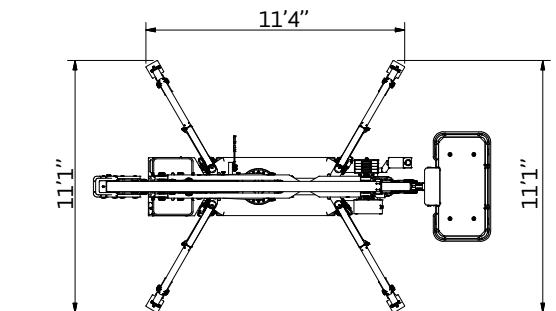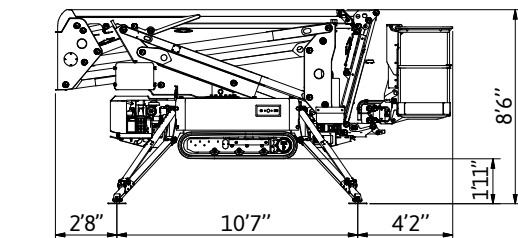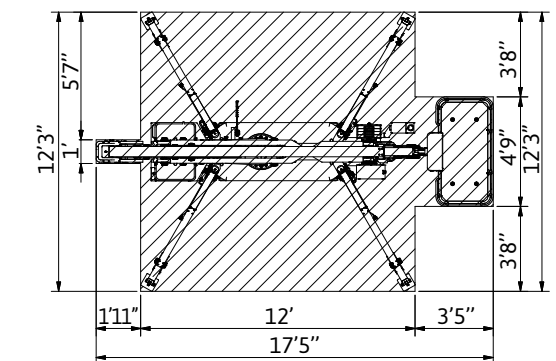

DIMENSIONS

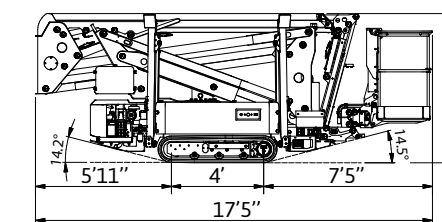

EXTENDED TRACK




66* ft	4'7"x2'3"x3'7" ft
28* ft	4515 lb
550 lb	59 ft

* outreach and height max values and repeatability can change within ± 3% due to manufacturing variation and working condition.

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only _TRACCESS 200/66 Imp - ed. 04/22



Track-mounted range from 42 ft to 88 ft

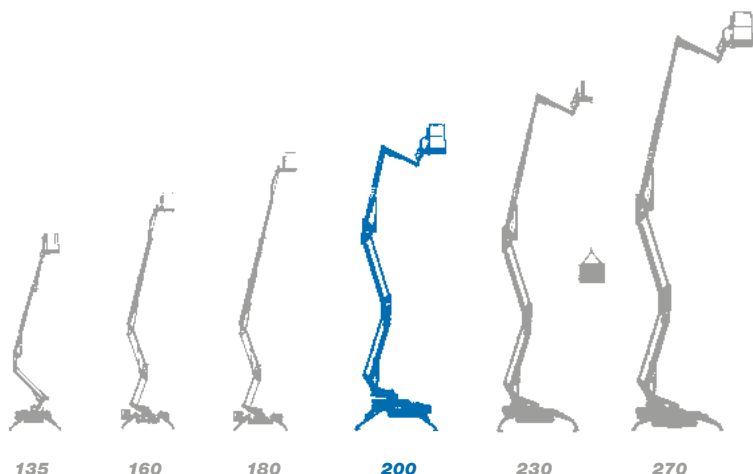

- ★ Most versatile boom configuration
- ★ Most compact machines in class
- ★ Protected electrical & hydraulic systems
- ★ User-friendly, intuitive controls
- ★ Easy maintenance
- ★ Excellent boom stability during operation
- ★ Choice of engines and options



**We are CTE, one of the largest
european companies in the
aerial work platform industry.**



**After sales
assistance**



**Service
spare parts**



**Scheduled
maintenance**



**On-site
assistance**



**Authorized
workshops**

“Work Becomes Easy” with efficient services, innovative technical solutions, timely assistance, professional guidance and training. This is our core philosophy when considering safety and quality of life on the job. CTE is united by ideas, motivation, and passion to simplify the work of our customers who need to elevate people.



CTE North America Corporation
16 Tolland Turnpike, Willington, CT 06279
Ph. (860) 656-9077
www.ctelift-na.com - info@ctelift-na.com

CTE North America Corporation is part of
CTE SpA
Via Caproni, 7 - 38068 Rovereto TN - Italy
www.ctelift.com



UNI EN ISO 9001:2008 IT 61659