

CTE TRACCESS 160/51

↑ 51 ft

→ 24 ft

👤 550 lb

Outstanding
combination of
performance
and versatility.

Compact.
Performance.
Innovation.



CTE TRACCESS 160/51

A 52 ft working height, 24 ft outreach, and 550 lb load capacity throughout the full working area, combined with the CAN BUS system makes this model a breakthrough in the industry.



550 lb unrestricted working area



Optional Winch with 505 lb lifting capacity



Doorway access



Different power sources available

TECHNICAL DATA

- » Articulated boom (two elements) + telescopic boom (main boom + 1 extension) + jib
- » Sigma boom articulation
- » $\pm 180^\circ$ non continuous turret rotation
- » Smooth proportional simultaneous controls with acceleration and deceleration
- » 2.4 GHz remote control with integrated display, home function, stabilization and start/stop
- » Aluminum basket available in single (2'6" x 2'3" x 3'7") or double (4'3" x 2'3" x 3'7") personnel sizes
- » 90° right + 90° left hydraulic basket rotation
- » Basket leveling with electronic adjustment from remote controller
- » Engine start and stop controls from basket
- » Dual drive with a maximum speed of 1 mph
- » Track width extends from X" to X"
- » CAN BUS electronic management system
- » 12V electric system
- » Load cell measures weight in basket to avoid overloading
- » 4 hydraulic outriggers with ground pressure sensors
- » Hour meter
- » 110 V AC EC electrical socket in the basket
- » Standard boom colours blue (RAL 5017) or white (RAL 9003)
- » Gradeability approximately 25%
- » 110 V 2.2 KW auxiliary engine
- » Rise and drive jib functionality
- » Automatic stabilization

ENGINES

- » Honda 11 Hp gas engine
- » Lombardini diesel engine
- » 48V Lithium battery



watch the video

STRENX
PERFORMANCE STEEL

IPAF

CTE TRACCESS 160/51




WHEELED,
EASILY REMOVABLE BASKET

GRAPHIC DISPLAY

WIRELESS REMOTE CONTROL


RISE AND DRIVE
JIB FUNCTIONALITY

WORKING ENVELOPE

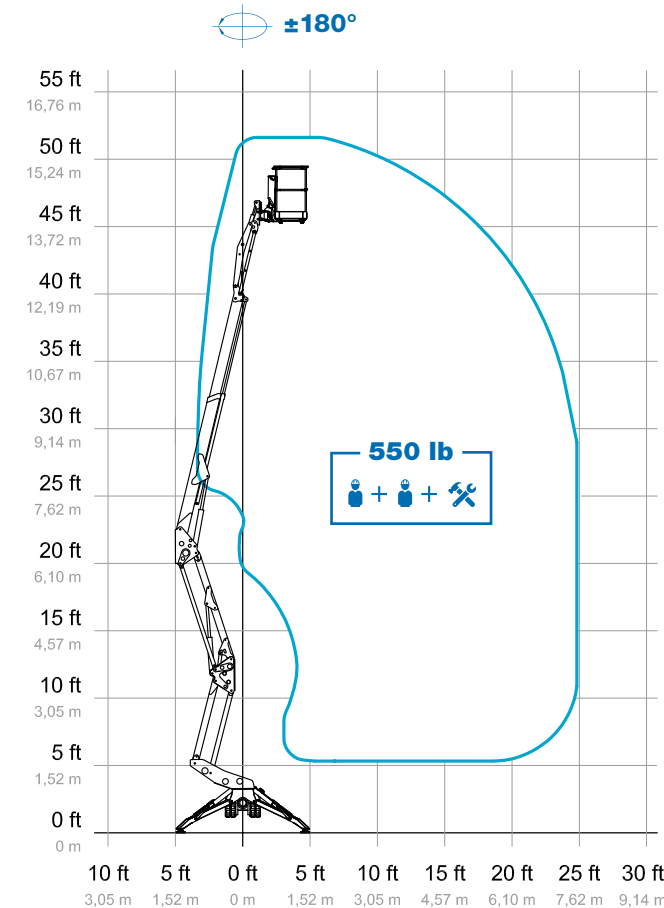


DIMENSIONS


MIN

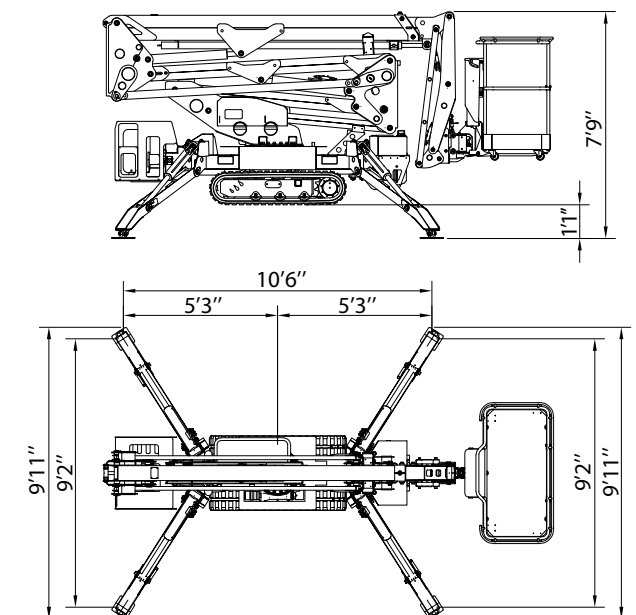

MAX

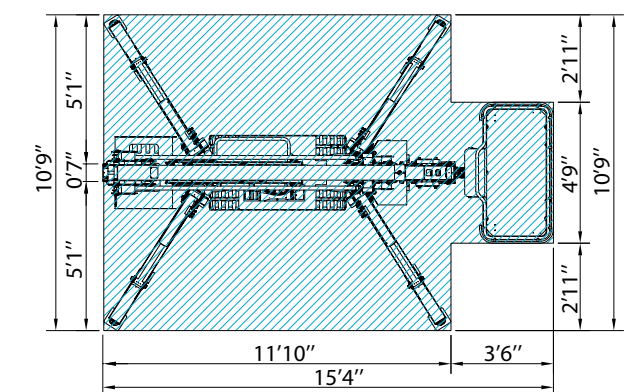

OUTRIGGER FOOTPRINT

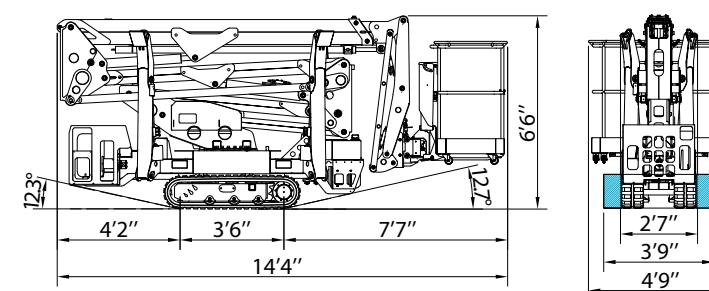

51' ft	4'7"x2'3"x3'7" ft
24' ft	5290 lb
550 lb	45' ft


* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only _TRACCESS 160/51 Imp - ed. 04/22

CTE TRACCESS 160/51



Track-mounted range from 42 ft to 88 ft

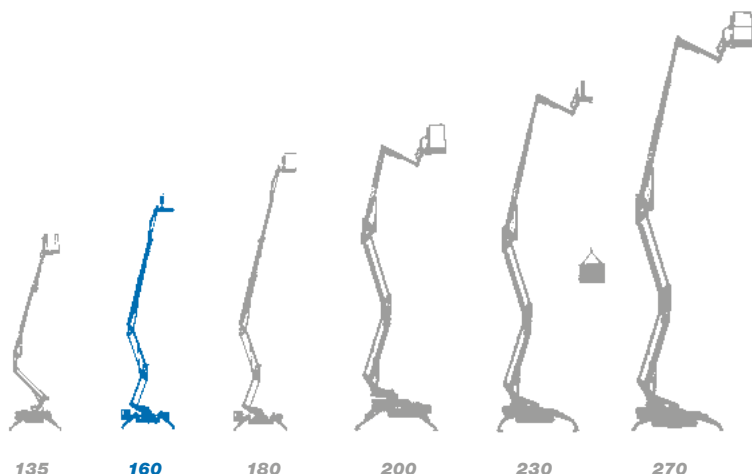

- ★ Most versatile boom configuration
- ★ Most compact machines in class
- ★ Protected electrical & hydraulic systems
- ★ User-friendly, intuitive controls
- ★ Easy maintenance
- ★ Excellent boom stability during operation
- ★ Choice of engines and options



**We are CTE, one of the largest
european companies in the
aerial work platform industry.**



**After sales
assistance**



**Service
spare parts**



**Scheduled
maintenance**



**On-site
assistance**



**Authorized
workshops**

“Work Becomes Easy” with efficient services, innovative technical solutions, timely assistance, professional guidance and training. This is our core philosophy when considering safety and quality of life on the job. CTE is united by ideas, motivation, and passion to simplify the work of our customers who need to elevate people.



CTE North America Corporation
16 Tolland Turnpike, Willington, CT 06279
Ph. (860) 656-9077
www.ctelift-na.com - info@ctelift-na.com

CTE North America Corporation is part of
CTE SpA
Via Caproni, 7 - 38068 Rovereto TN - Italy
www.ctelift.com



UNI EN ISO 9001:2008 IT 61659