

CTE TRACCESS 270/88

↑ 88 ft

→ 46 ft

👤 550 lb

Reaching higher
performance in
the safest way with
S³ EVO.


The optimal mix of performance
and simplicity.

CTE TRACCESS 270/88

The highest performing of the TRACCESS family, with an impressive 88 ft working height, 46 ft outreach, and a 550 lb capacity in the entire working envelope.



Unrestricted working area



Versatile outrigger configuration



Doorway access



Different power sources available



Optional Winch with 505 lb lifting capacity



S³ EVO

TECHNICAL DATA

- » Articulated boom (two elements) + telescopic boom (main boom + 2 extension) + jib
- » Sigma boom articulation
- » Boom rotation $\pm 300^\circ$ non-continuous
- » Smooth proportional simultaneous controls with acceleration and deceleration
- » Wireless remote controller with plug in for electrohydraulic controls in the basket and from the ground
- » Translation controlled by radio command and cable from the ground and from the basket
- » Graphic diagnostic display
- » Motor start and stop with wireless remote control
- » Aluminum basket available in single (2'6" x 2'3" x 3'7") or double (4'3" x 2'3" x 3'7") personnel sizes
- » 90° right + 90° left hydraulic basket rotation
- » Basket leveling with manual level management from the basket and electronic un-leveling
- » Track width extends from 31" to 50"
- » Dual drive speed
- » Load cell measures weight in basket to avoid overloading
- » 4 outriggers with sensor contacts and outrigger covers
- » Stabilization management with S³ EVO with 4 independent stabilizers
- » Home function brings boom to stowed position with the push of a button
- » Smart ramps
- » Basket self-leveling
- » Rise and drive jib functionality



watch the video

STRENX
PERFORMANCE STEEL

IPAF



**WHEELED,
EASILY REMOVABLE BASKET**



**48 V BATTERY KIT
FOR HYBRID USE**





**EASIER SELF-LOADING
OPERATIONS**




**VALVE BLOCK
PROTECTION KIT**



WORKING ENVELOPE

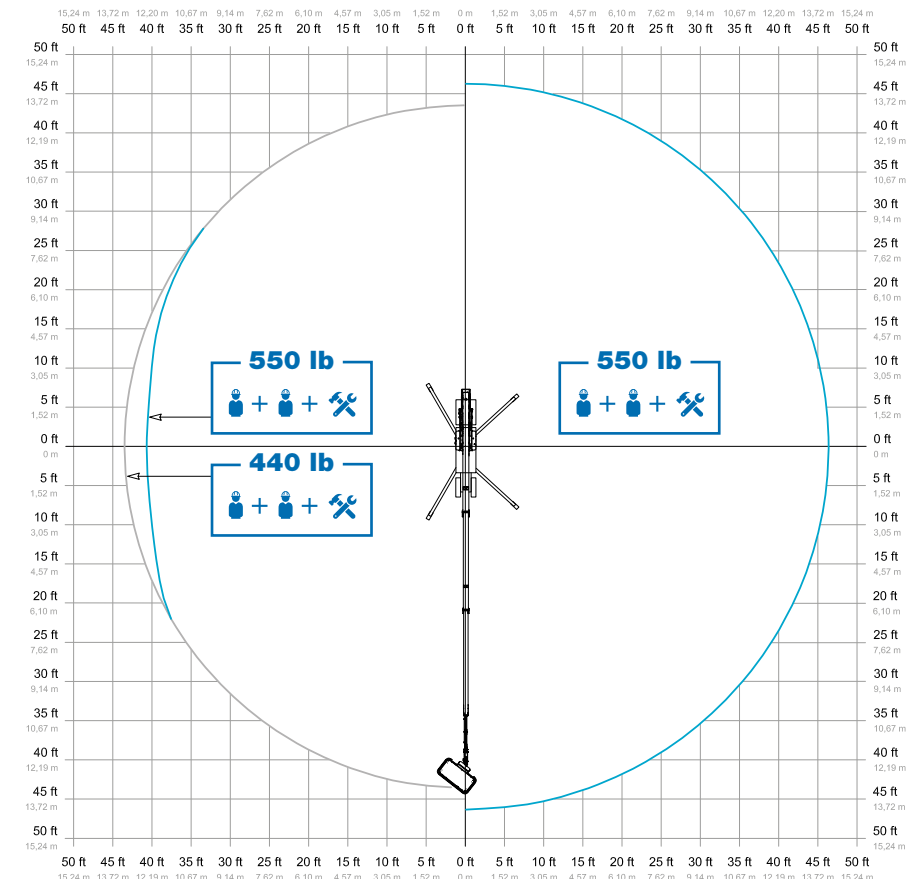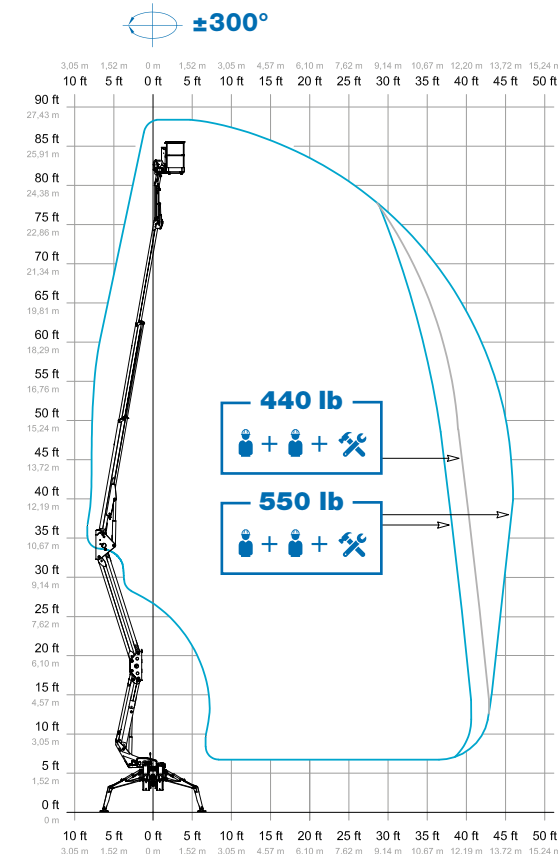

OUTRIGGER FOOTPRINT

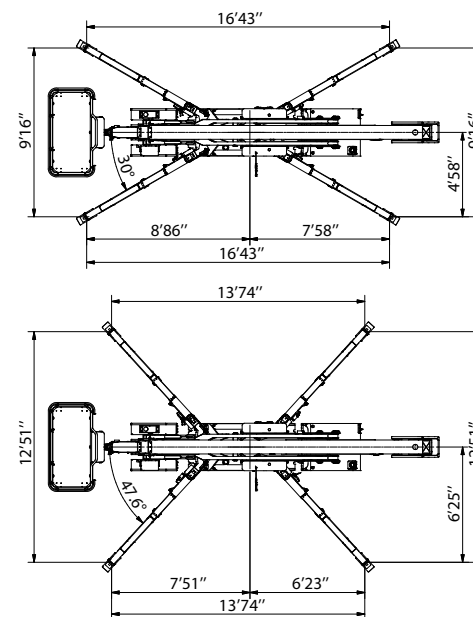

DIMENSIONS

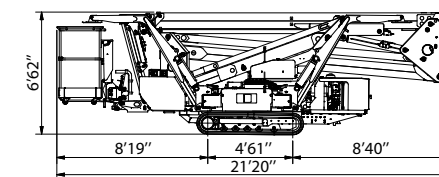


	88* ft		4'3"x2'6"x3'6\"
	46* ft		9590 lb
	550 lb		82* ft

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only _TRACCESS 270/88 Imp - ed. 04/22



Track-mounted range from 42 ft to 88 ft

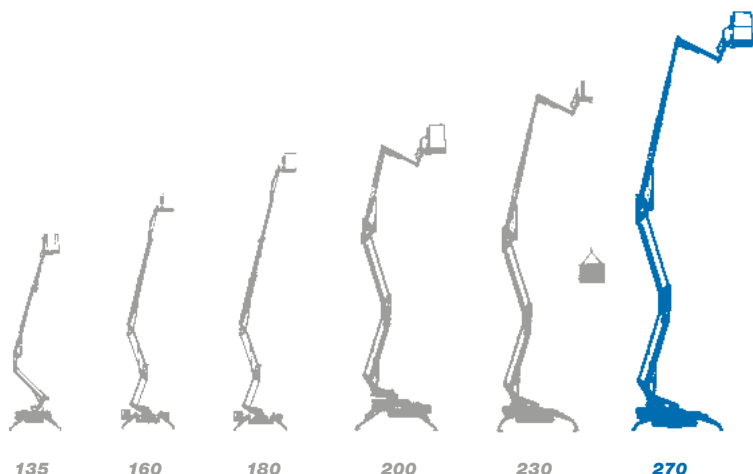

- ★ Most versatile boom configuration
- ★ Most compact machines in class
- ★ Protected electrical & hydraulic systems
- ★ User-friendly, intuitive controls
- ★ Easy maintenance
- ★ Excellent boom stability during operation
- ★ Choice of engines and options



**We are CTE, one of the largest
european companies in the
aerial work platform industry.**



**After sales
assistance**



**Service
spare parts**



**Scheduled
maintenance**



**On-site
assistance**



**Authorized
workshops**

“Work Becomes Easy” with efficient services, innovative technical solutions, timely assistance, professional guidance and training. This is our core philosophy when considering safety and quality of life on the job. CTE is united by ideas, motivation, and passion to simplify the work of our customers who need to elevate people.



CTE North America Corporation
16 Tolland Turnpike, Willington, CT 06279
Ph. (860) 656-9077
www.ctelift-na.com - info@ctelift-na.com

CTE North America Corporation is part of
CTE SpA
Via Caproni, 7 - 38068 Rovereto TN - Italy
www.ctelift.com



UNI EN ISO 9001:2008 IT 61659