

CTE TRACCESS 270

↑ 88 ft

→ 46 ft

👤👤 550 lb

Reaching higher
performances in
the safest way with
S³ EVO.

The optimal mix of performance
and ease of use.




CTE TRACCESS 270

Top of the range of TRACCESS family with impressive 88 ft working height, 46 ft of max outreach and 550 lb of nominal capacity in the entire working envelope.



Unrestricted working area



The most versatile stabiliser configuration



Doorway access



Different power sources available



Winch with 505 lb lifting capacity



S³ EVO

TECHNICAL DATA

- » Articulated boom (two elements) + telescopic boom (main boom + 2 extension) + jib
- » Sigma boom articulation
- » Boom rotation $\pm 300^\circ$ non-continuous
- » Smooth proportional simultaneous controls with acceleration and deceleration ramps
- » Wireless remote controller with plug in for electrohydraulic controls in the basket and from the ground
- » Translation controlled by radio command and cable from the ground and from the basket
- » Graphic diagnostic display
- » Motor start and stop by radio control
- » Quick release aluminum basket with wheels (4'3"x2'6"x3'6" ft)
- » 90° right + 90° left hydraulic basket rotation
- » Master-Slave basket leveling with manual level management from the basket and electronic un-leveling
- » Extendable width track
- » Dual drive speed
- » Load cell
- » 4 outriggers with sensor contacts and outrigger covers
- » Stabilization management with S³ EVO with 4 independent stabilizers
- » Home function
- » Smart ramps
- » Anticrush
- » Basket self-centering
- » Rise&drive jib functionality



watch the video

STRENX
PERFORMANCE STEEL

IPAF

CTE TRACCESS 270



**WHEELED,
EASY-REMOVABLE BASKET**



**48 V BATTERY KIT
FOR HYBRID USE**





**EASIER SELF-LOADING
OPERATIONS**




**VALVE BLOCK
PROTECTION KIT**




WORKING ENVELOPE

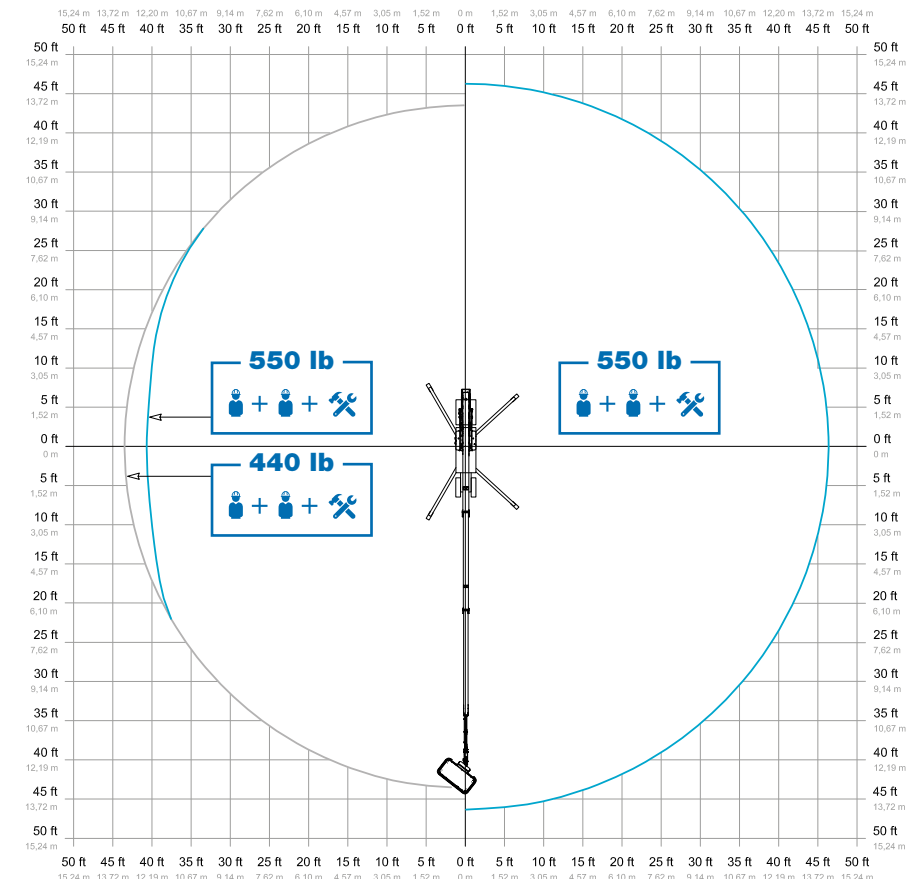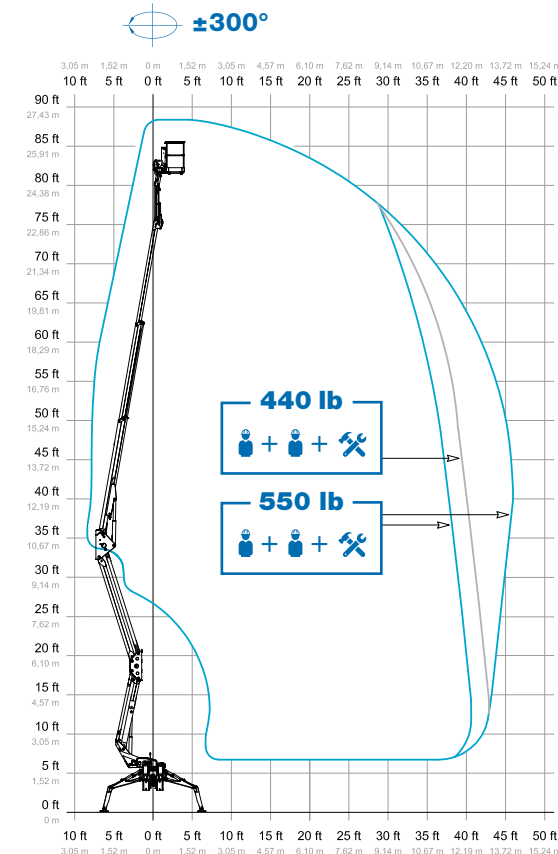

OUTRIGGER FOOTPRINT

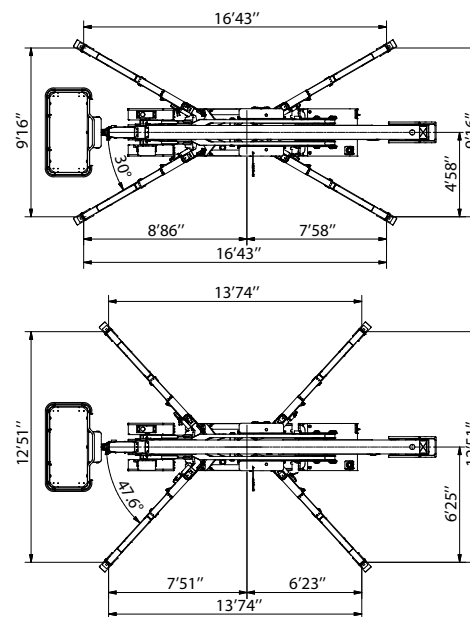

DIMENSIONS

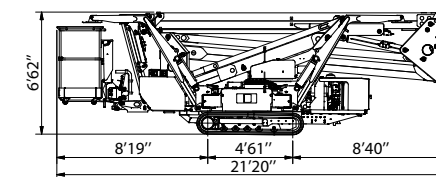

	88* ft		4'3"x2'6"x3'6" ft
	46* ft		9590 lb
	550 lb		82* ft


* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only _TRACCESS 270 - ed. 05/21

CTE TRACCESS 270



Track-mounted range from 42 m to 88 ft

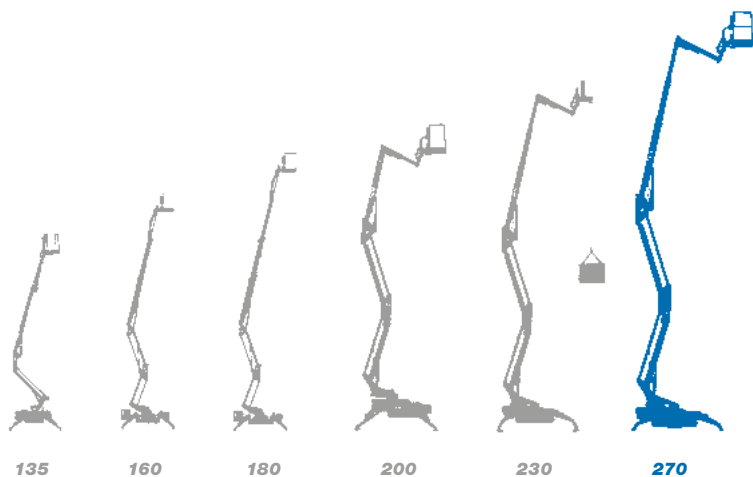

- ★ Most versatile boom configuration
- ★ Most compact machines in class
- ★ Clean top boom
- ★ Friendly to use intuitive controls
- ★ Easy maintenance
- ★ Excellent boom rigidity during operation
- ★ Versatility of engines and versions



**We are CTE, one of the largest
european groups in the field of
lifting people and handling of material.**



**After sales
assistance**



**Service
spare parts**



**Scheduled
maintenance**



**On-site
assistance**



**Authorized
workshops**

Efficient services, innovative technical solutions, timely assistance, professional advice and training: 'Work Becomes Easy' is all this. A style, a philosophy at the heart of which are our customers, their safety, their quality of life. For this reason there is a group in CTE united by ideas, motivation and passion to simplify the work of companies active in the lifting of people and objects.



CTE s.p.a.
Via Caproni, 7
38068 Rovereto (TN)

Factory
Loc. Terramatta, 5
37010 Rivoli Veronese (VR)

Tel. +39 0464 48.50.50
info@ctelift.com
www.ctelift.com



UNI EN ISO 9001:2008 IT 61659