

CTE TRACCESS 270/88

↑ 88 ft

→ 46 ft

👤 550 lb

Reaching higher
performance in
the safest way with
S³ EVO.

The optimal mix of performance
and simplicity.



CTE TRACCESS 270/88

The highest performing of the TRACCESS family, with an impressive 88 ft working height, 46 ft outreach, and a 550 lb capacity in the entire working envelope.



Unrestricted working area



Versatile outrigger configuration



Doorway access



Different power sources available



Optional Winch with 505 lb lifting capacity



S³ EVO

TECHNICAL DATA

- » Articulated boom (two elements) + telescopic boom (main boom + 2 extension) + jib
- » Sigma boom articulation
- » Boom rotation $\pm 300^\circ$ non-continuous
- » Proportional simultaneous controls with smooth acceleration and deceleration
- » Wireless remote controller with plug in for electrohydraulic controls in the basket and from the ground
- » Track drive controlled by wireless remote or cable from the ground and from the basket
- » Graphic diagnostic display
- » Motor start and stop with wireless remote control
- » Aluminum basket available in single (2'6" x 2'3" x 3'7") or double (4'3" x 2'3" x 3'7") personnel sizes
- » 90° right + 90° left hydraulic basket rotation
- » Hydraulically controlled basket leveling manually adjustable from the remote
- » Track width extends from 2'6" to 4'2"
- » Dual drive speed
- » Basket capacity controlled by load sensor
- » 4 outriggers with sensor contacts and outrigger covers
- » Stabilization management with S³ EVO with 4 independent stabilizers
- » Home function brings boom to stowed position with the push of a button
- » Maneuvering acceleration and deceleration automatically electronically controlled based on working conditions
- » Basket self-leveling
- » Rise and drive jib functionality - ability to drive with jib raised



watch the video

STRENX™
PERFORMANCE STEEL





**WHEELED,
EASILY REMOVABLE BASKET**



**48 V BATTERY KIT
FOR HYBRID USE**





**EASIER SELF-LOADING
OPERATIONS**




**VALVE BLOCK
PROTECTION KIT**




WORKING ENVELOPE

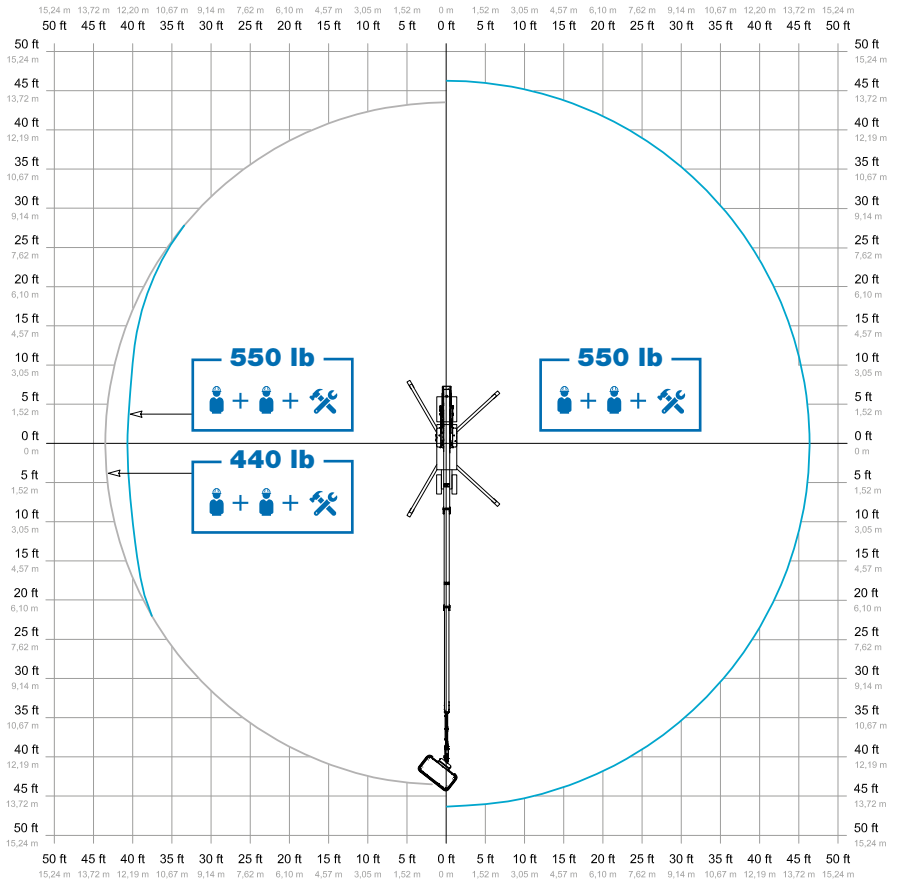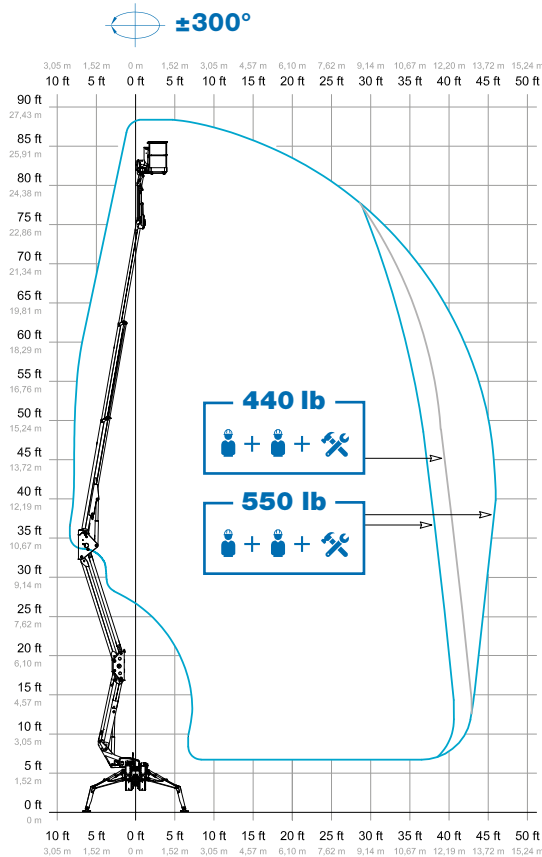

OUTRIGGER FOOTPRINT

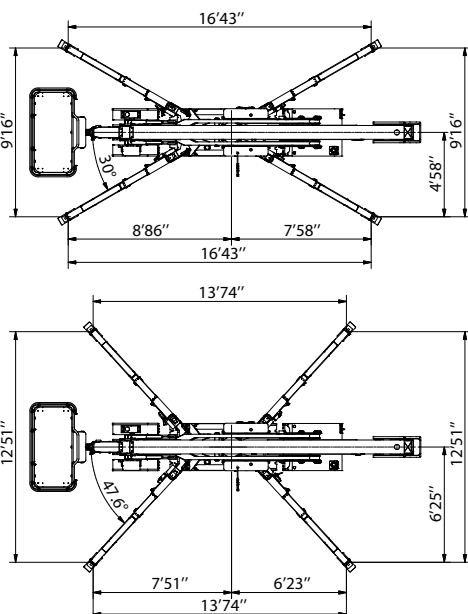

DIMENSIONS

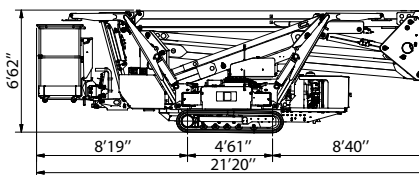

88* ft



4'3"x2'6"x3'6" ft



46* ft



9590 lb



550 lb




82* ft

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only _TRACCESS 270/88 Imp - ed. 04/22



Track-mounted range from 42 ft to 88 ft

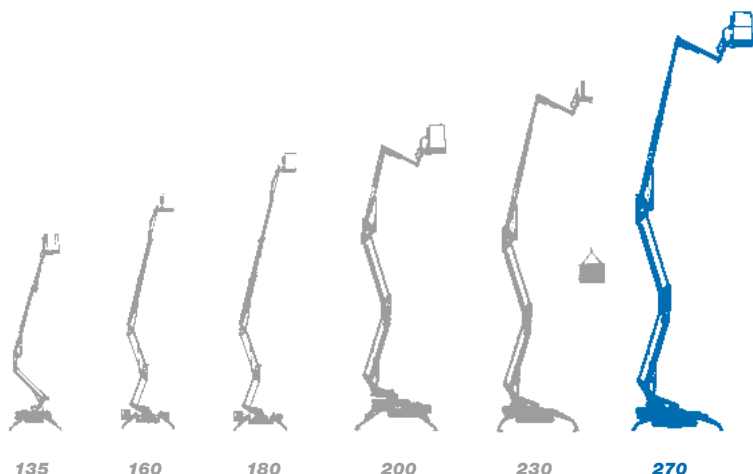

- ★ Most versatile boom configuration
- ★ Most compact machines in class
- ★ Protected electrical & hydraulic systems
- ★ User-friendly, intuitive controls
- ★ Easy maintenance
- ★ Excellent boom stability during operation
- ★ Choice of engines and options



**We are CTE, one of the largest
european companies in the
aerial work platform industry.**



**After sales
assistance**



**Service
spare parts**



**Scheduled
maintenance**



**On-site
assistance**



**Authorized
workshops**

“Work Becomes Easy” with efficient services, innovative technical solutions, timely assistance, professional guidance and training. This is our core philosophy when considering safety and quality of life on the job. CTE is united by ideas, motivation, and passion to simplify the work of our customers who need to elevate people.



CTE North America Corporation
16 Tolland Turnpike, Willington, CT 06279
Ph. (860) 656-9077
www.ctelift-na.com - info@ctelift-na.com

CTE North America Corporation is part of
CTE SpA
Via Caproni, 7 - 38068 Rovereto TN - Italy
www.ctelift.com



UNI EN ISO 9001:2008 IT 61659