


SPECIFICATION (PRELIMINARY)

CTEZED 25 HV

TECHNICAL DATA

- Double pantograph + telescopic boom with 2 extensions
- Sigma boom movement enabled by connecting rods
- Proportional, simultaneous electrohydraulic controls in basket and ground
- Engine start and stop controls from basket and ground
- Anti-slip aluminium deck
- Aluminum basket 1400x700x1100 mm
- 65° + 65° hydraulic basket rotation
- Automatic hydraulically actioned basket levelling
- 4 stabilisers with ground pressure sensors: front variable jacking outriggers and rear straight down stabilizers
- Variable stabilisation with **S³ Smart Stability System**
- **CAN BUS** electronic management system
- Grounded control station with wired console
- Load cell
- Diagnostic display on board
- Hydraulic system operated by vehicle's PTO
- Buzzer indicating PTO engaged
- Hour meter
- 230 V AC in the basket
- EN 280:2015 CE certified
- Standard boom colours
blue (RAL 5017) and white (RAL 9003)

DIMENSIONS

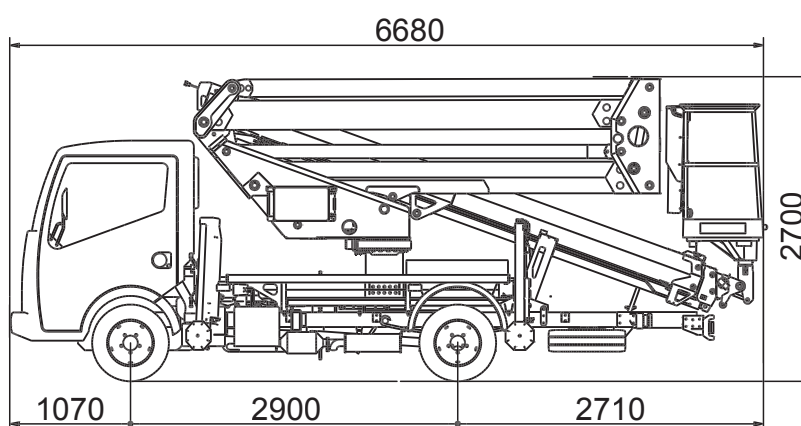

CTE S.p.A. **Headquarter**

7 Via Caproni - Rovereto (TN) IT, 38068
Ph. +39 0464 48.50.50 - **Fax** +39 0464 48.50.99
info@ctelift.com - **www.ctelift.com**

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

SPECIFICATION (PRELIMINARY)

CTEZED 25 HV



24,6 m*



250 kg



1400x700x1100 mm



11,7 m*




22,6 m

GVW min

3,5 t

WORKING ENVELOPE

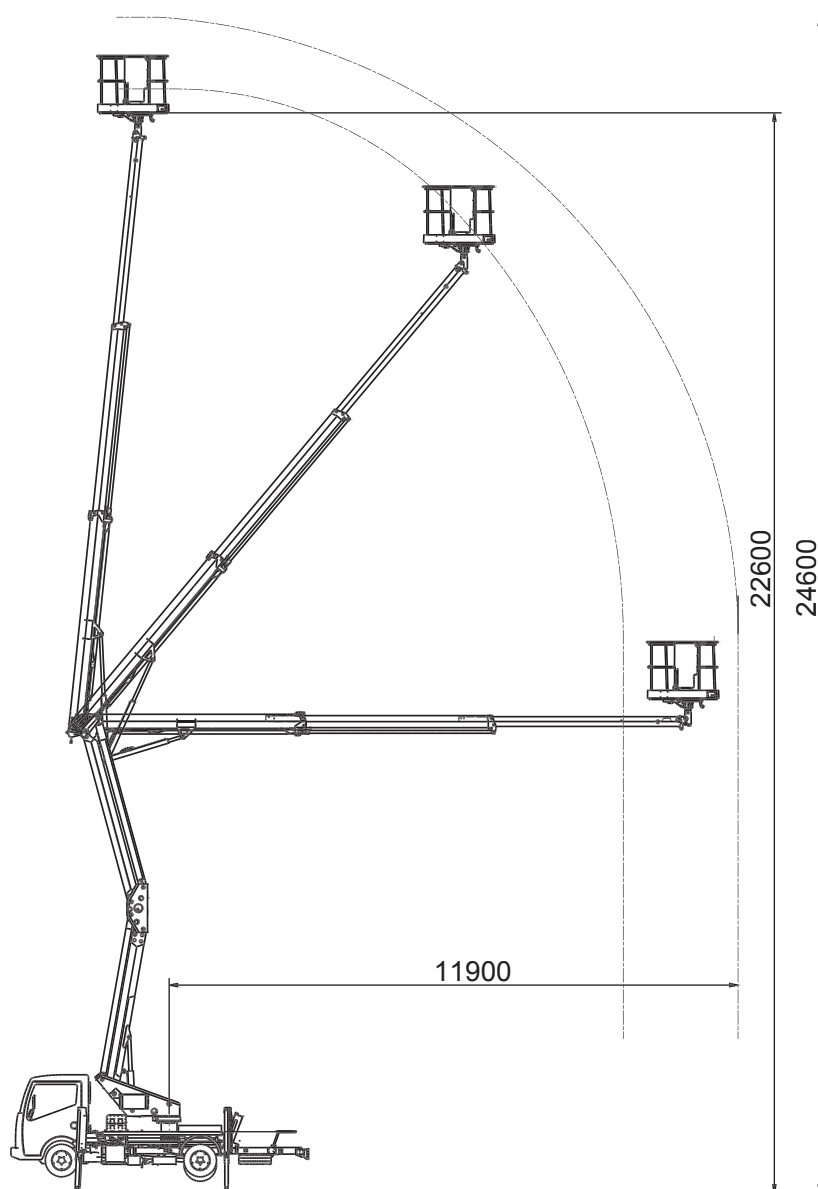

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only. ZED 25 HV - ed. 04/17



CTE S.p.A.
Headquarter

7 Via Caproni - Rovereto (TN) IT, 38068
Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99
info@ctelift.com - www.ctelift.com

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK